

Rittal – The System.

Faster – better – everywhere.



RX 9360.535

RiLineX CB device adapter

State: 6/30/2026 (Source: rittal.com/us-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9360.535 - RiLineX CB device adapter

RiLineX CB device adapter (3-pole, max. 630 A) for 60 mm busbar systems. The device width is 145 mm. Thanks to the Easy-Fix concept, adapter and switch installation can be carried out independently of each other. This concept is available for all popular manufacturers. The adapter has tool-free snap-on mounting with semi-automatic adjustment of the rail thickness between 5 and 10 mm. The cable outlet can be adapted to individual requirements by simply converting the outlet at the bottom or top.

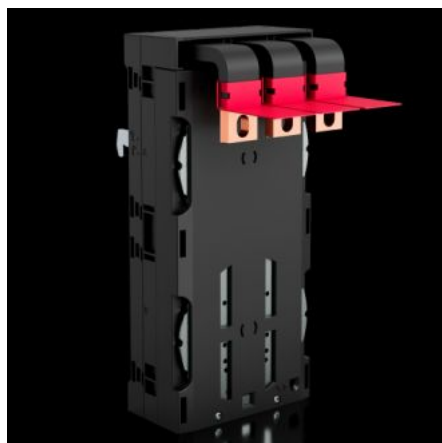

Features

Model No.	RX 9360.535
Version	Easy Fix
Benefits	Direct mounting of compact circuit breaker MCCB on the board Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm Quick and easy pre-assembly of standard switch types outside the control cabinet
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94
Color	RAL 9005 RAL 35745
Supply includes	Incl. 3 clamp covers
Protection category IP to IEC 60529	IP 2XB

Features

Rated impulse withstand voltage U _{Imp}	8 kV
Rated voltage	690 V AC 600 V AC (UL)
Rated insulation voltage U _i	1,000 V
Contamination level	3
Number of poles	3-pole
Cable outlet	Top/bottom
Cross-section	29 mm ² 6 mm ²
To fit manufacturer (model)	Easily find the right device adapter with our selection guide in the Downloads area.
Suitable for busbar system	RiLineX RiLine60
Fundamental frequency	50...60 Hz
Ambient humidity (non-condensing)	10...90 %
Suitable for busbars	15 x 5/10 20 x 5/10 30 x 5/10
Operating temperature range	-25 °C...55 °C -13 °F...131 °F
Storage temperature range	-25 °C...75 °C -13 °F...167 °F
Dimensions	Width: 145 mm Height: 325.8 mm Depth: 76.4 mm Width: 5.71 " Height: 12.8 " Depth: 3.01 "
Fire load	22.239 MJ/m ²
Packaging unit	1 pc(s).

Features

Net weight	5 kg
Gross weight	5.206 kg
Copper weight (kg per piece)	2.64
PCF/VE (cradle-to-gate)	30.05
Customs tariff number	85369095
ETIM 9	EC001531
Product description	RX CB device adapter 630 A, 3-pole, version: Easy Fix, W: 140 mm

Approvals

Approvals	UL + C-UL (listed)
Explanations	Declaration of conformity PCF-declaration
