


**Rittal – The System.**

Faster – better – everywhere.

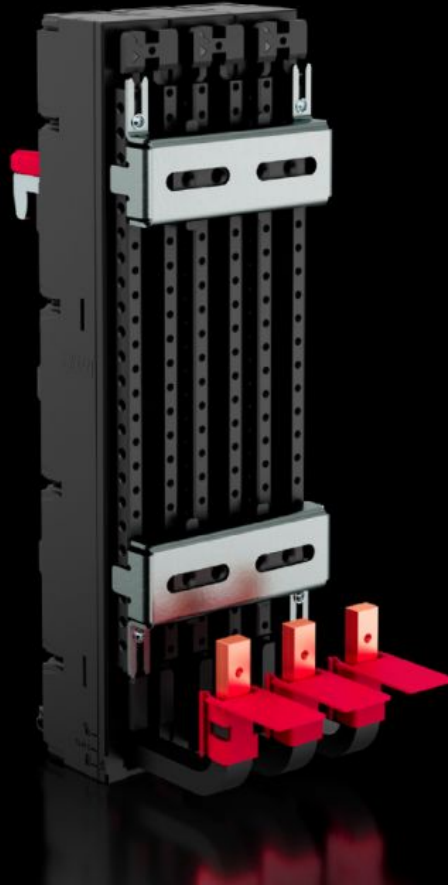

**RX 9360.603**

**RiLineX CB device adapter**

State: 7/4/2026 (Source: [rittal.com/us-en](http://rittal.com/us-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9360.603 - RiLineX CB device adapter

RiLineX CB device adapter (3-pole, max. 160 A) for 60 mm busbar systems. The device width is 81 mm. The "universal" version with sliding nuts offers maximum flexibility for switch installation. The adapter has tool-free snap-on mounting with semi-automatic adjustment of the rail thickness between 5 and 10 mm. Version for cable outlet at the top.



## Features

Model No.	RX 9360.603
Version	universal
Benefits	Direct mounting of compact circuit breaker MCCB on the board Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm Quick and easy pre-assembly of standard switch types outside the control cabinet
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94
Color	RAL 9005 RAL 35745
Protection category IP to IEC 60 529	IP 2XB
Rated impulse withstand voltage U <sub>Imp</sub>	8 kV
Rated voltage	690 V AC 600 V AC (UL)

# Features

Rated insulation voltage Ui	1,000 V
Contamination level	3
Number of poles	3-pole
Cable outlet	Top
Type of connection (electrical)	Box terminal
Cross-section	9 mm <sup>2</sup> 6 mm <sup>2</sup>
To fit manufacturer (model)	Easily find the right device adapter with our selection guide in the Downloads area.
Suitable for busbar system	RiLineX RiLine60
Fundamental frequency	50...60 Hz
Ambient humidity (non-condensing)	10...90 %
Suitable for busbars	15 x 5/10 20 x 5/10 30 x 5/10
Operating temperature range	-25 °C...55 °C -13 °F...131 °F
Storage temperature range	-25 °C...75 °C -13 °F...167 °F
Dimensions	Width: 82 mm Height: 251.4 mm Depth: 50.8 mm Width: 3.23 " Height: 9.9 " Depth: 2 "
Fire load	22.045 MJ/m <sup>2</sup>
Packaging unit	1 pc(s).
Net weight	1.21 kg
Gross weight	1.217 kg

# Features

---

Copper weight (kg per piece)	0.375
PCF/VE (cradle-to-gate)	12.86
Customs tariff number	39269097
Product description	RX CB device adapter 160 A, 3-pole, version: Universal Fix, cable outlet at top, W: 81 mm

---

# Approvals

---

Approvals	UL + C-UL (listed)
Explanations	Declaration of conformity PCF-declaration

---