

# Rittal – The System.

Faster – better – everywhere.



## RX 9364.022

## RiLineX bus-mounting fuse element


State: 2/13/2026 (Source: [ittal.com/us-en](http://ittal.com/us-en))



FRIEDHELM LOH GROUP

# RX 9364.022 - RiLineX bus-mounting fuse element

Compact RiLineX bus-mounting fuse element for 60 mm busbar systems. For cylinder fuse 10 x 38 mm with optical LED fuse monitoring. For safe contacting of the cylinder fuses, the device has special fuse holders that can be locked when open and sealed when closed. Tension clamp terminals up to 16 mm<sup>2</sup> at an angle of 45° make it easier to connect conductors. The device is suitable for tool-free snap-on installation with semi-automatic rail adjustment for 5 and 10 mm.

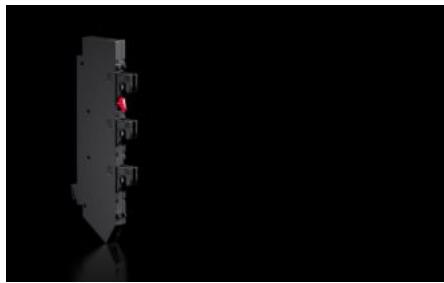

## Features

Model No.	RX 9364.022
Benefits	Safe contacting of the fuse links (without screw caps) Snap-on mounting and easy adjustment on busbar thickness 5/10 mm Optical LED fuse monitoring Voltage test through separate opening Maintenance-free tension spring connection up to 16 mm <sup>2</sup> Complete contact protection without additional accessories such as screw caps
Product changes	(secondary)
Material	Polyamide (PA 6) Fire protection corresponding to UL 94-V0
Color	RAL 35745 RAL 9005
Rated current max.	32 A
Cable outlet	Bottom

# Features

Number of poles	3-pole
Suitable for busbar system	RiLineX RiLine60
Dimensions	Width: 17.8 mm Height: 262.5 mm Depth: 95 mm Width: 0.7 " Height: 10.3 " Depth: 3.74 "
Connection of round conductors, fine wire with wire end ferrule	1.5 - 6 mm <sup>2</sup>
Connection of round conductors, fine wire with wire end ferrule AWG	AWG 16 - AWG 10
Connection of round conductors, multi-wire	1.5 - 6 mm <sup>2</sup>
Connection of round conductors, multi-wire AWG	AWG 16 - AWG 10
Suitable for busbars	15 x 5/10 20 x 5/10 30 x 5/10
Rated voltage	400 V AC
Overvoltage category	4
Contamination level	3
Standards	IEC 60 947-3
Rated insulation voltage Ui	800 V
Power dissipation (max.)	3 W 10 BTU/h
Protection category IP to IEC 60 529	IP 2XB
Operation humidity max.	90 %
Operating temperature range	-5 °C...55 °C 23 °F...131 °F

## Features

---

Storage temperature range	-25 °C...75 °C -13 °F...167 °F
Ambient humidity (non-condensing)	10...90 %
Utilization category	AC-20B (400 V/100 A)
Fuse inserts	10 x 38 mm
Packaging unit	4 pc(s).
Net weight	1.008
Gross weight	1.014
Copper weight (kg per piece)	0.043
Customs tariff number	85369095
ETIM 9	EC001644

---

## Approvals

---

Explanations	Declaration of conformity
--------------	---------------------------

---