
## Rittal – The System.

Faster – better – everywhere.



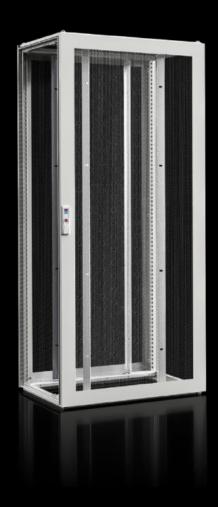

# SV 9690.040 Energy-saving enclosure

State: 12/7/2025 (Source: rittal.com/us-en)



## SV 9690.040 - Energy-saving enclosure VX ESS

Enclosure frame with roof plate, perforated door and rear panel. With flexible interior fitting. Ideal for efficient and modular expansion of energy storage with slide rails.

#### **Features**

Model No.	SV 9690.040
Version	With flexible interior fitting
Material	Enclosure frame: Carbon steel, 1.5 mm
	Roof sheet: carbon steel, 1.5 mm
	Door: Carbon steel, 1.5 mm
	Rear wall: carbon steel, 1.5 mm
Surface finish	Enclosure frame: Dipcoat-primed
	Door, roof and rear panel: powder-coated, textured paint
Color	RAL 7035
Supply includes	Enclosure frame
	Door and rear panel, perforated
	Roof plate
	Lock: 3 mm double-bit
Protection category IP to EN 60 529	IP 20
Dimensions	Width: 600 mm
	Height: 2,000 mm
	Depth: 600 mm
	Width: 23.6 "
	Height: 78.7 "
	Depth: 23.6 "
Packaging unit	1 pc(s).
Net weight	66
Gross weight	66.2
PCF/VE (cradle-to-gate)	208.2 kg CO2 eq (Cat B)
Information regarding the PCF class	Category B: PCF value (cradle-to-gate) calculated approximately on the basis of the product weight and self-declared

© Rittal 2025

### Features

EAN	4028177044272
ETIM 9	EC000261

## **Approvals**

Explanations Declaration of conformity

© Rittal 2025 3