

Rittal – The System.

Faster – better – everywhere.



RX 9360.805

RiLineX bus-mounting fuse base

State: 23/05/2026 (Source: rittal.com/au-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9360.805 - RiLineX bus-mounting fuse base

RiLineX bus-mounting fuse base for 60 mm busbar systems. For slow fuse D 01 (with gauge ring) and D 02 (E18). With electronic and optical LED fuse monitoring via alarm contacts. For reliable fuse contacting, the device has fuse holders instead of screw caps which are lockable the open state and sealable in the closed state. A spring terminal block up to 16 mm² at an angle of 45° allows easier conductor connection. The device is suitable for tool-free snap-on mounting and has semi-automatic rail adjustment for 5 and 10 mm.

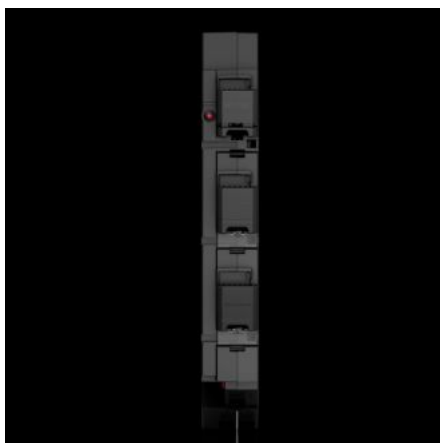

Features

| | |
|----------------------|--|
| Model No. | RX 9360.805 |
| Benefits | Reliable contacting of fuse inserts (without screw caps) Snap-on mounting and simple adjustment for busbar thickness (5/10 mm) Optical LED fuse monitoring Voltage test through separate opening Maintenance-free tension spring connection up to 16 mm ² Complete contact hazard protection without any additional accessories (such as screw caps) |
| Product modification | (secondary) |
| Material | Polyamide (PA 6) Fire protection corresponding to UL 94-V0 |
| Colour | RAL 35745 RAL 9005 |
| Supply includes | 4 bus-mounting fuse bases 12 reducers for D 01 fuses |

Features

| | |
|--------------------------------------|--|
| Type of electrical connection | Spring terminal |
| Rated current max. | 63 A |
| Rated operating voltage | 400 V AC |
| Cable outlet | Bottom |
| Number of poles | 3-pole |
| To fit busbar system | RiLineX RiLine60 |
| Dimensions | Width: 35.8 mm Height: 253.8 mm Depth: 89.8 mm |
| Connection of round conductors | 16 mm ² |
| To fit busbars | Height: 5, 10 mm |
| To fit busbars | 15 x 5/10 20 x 5/10 30 x 5/10 |
| Rated voltage | 400 V AC |
| Overvoltage category | 4 |
| Contamination level | 3 |
| Standards | IEC/DIN EN 60 947-3 |
| Rated insulation voltage Ui | 1,000 V |
| Heat loss max. | 5.5 W |
| IP protection category to IEC 60 529 | IP 2XB |
| Maximum operating air humidity | 90 % |
| Operating temperature range | -5 °C...55 °C |
| Storage temperature range | -25 °C...75 °C |
| Ambient humidity (non-condensing) | 10...90 % |
| Utilisation category | AC-21B (400 V/100 A) |

Features

| | |
|-------------------------------|---|
| Fuse inserts | D 02-E 18 |
| Packs of | 4 pc(s). |
| Net weight | 1.796 kg |
| Gross weight | 1.8 kg |
| Copper weight (kg per piece) | 0.07 |
| PCF per pack (cradle-to-gate) | 12.02 |
| Customs tariff number | 85369095 |
| ETIM 9 | EC001644 |
| Product description | RiLineX bus-mounting fuse base for 60 mm busbar systems. For slow fuse D 01 (with gauge ring) and D 02 (E18). With electronic and optical LED fuse monitoring via alarm contacts. For reliable fuse contacting, the device has fuse holders instead of screw caps which are lockable the open state and sealable in the closed state. A spring terminal block up to 16 mm ² at an angle of 45° allows easier conductor connection. The device is suitable for tool-free snap-on mounting and has semi-automatic rail adjustment for 5 and 10 mm. |

Approvals

| | |
|--------------|--|
| Explanations | Declaration of conformity PCF-declaration |
|--------------|--|

Tender text

RiLineX Bus-mounting fuse base (Typ D0 with EFM)

Bus-mounting fuse base for slow fuse D 01 (with gauge ring) and D 02 (E18).
Fuse inserts are inserted via swing-out holders
no screw caps are required.
Optical fuse monitoring with LED.

Conductor connection via tension spring terminals.

Rated voltage 400 V AC.

Product information

Number of poles: 3

Busbar dimensions: 15/20/30 mm x 5/10 mm

Connection: 1,5 - 16 mm²

Cable outlet: bottom

Feature: Electronic fuse monitoring

Dimensions: 36 mm x 254 mm x 90 mm (WxHxD)

Manufacturer: Rittal GmbH & Co. KG

Type: 9360805