

# Rittal – The System.

Faster – better – everywhere.



## RX 9360.535

## RiLineX CB component adaptor

State: 11.09.2025 (Source: [rittal.com/bg-bg](https://www.rittal.com/bg-bg))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9360.535 - RiLineX CB component adaptor

RiLineX CB component adaptor (3-pole, max. 630 A) for 60 mm busbar systems. The device width is 140 mm. The "Easy-Fix" concept allows adaptors and switches to be mounted independently of one another. This concept is available for all popular manufacturers. The adaptor features tool-free snap-on mounting with semi-automatic adjustment of the bar thickness between 5 and 10 mm. The cable outlet is easily converted to the top or bottom to suit individual requirements.

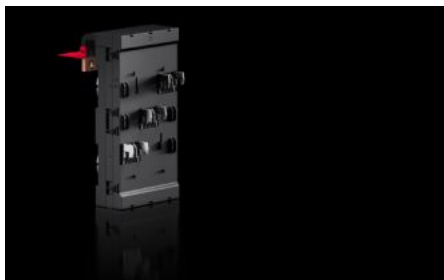

## Features

|                                      |   |
|--------------------------------------|---|
| Model No.                            | RX 9360.535   |
| Design                               | Easy Fix  |
| Benefits                             | Direct mounting of moulded-case circuit-breakers (MCCBs) on the board<br>Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm<br>Fast, simple pre-assembly of standard market switch types outside of the enclosure |
| Material                             | Polyamide (PA 6)<br>Fire protection corresponding to UL 94  |
| Colour                               | RAL 9005<br>RAL 35745   |
| Supply includes                      | 3 terminal covers   |
| IP protection category to IEC 60 529 | IP 2XB  |
| Rated impulse withstand voltage Uimp | 12 kV   |

# Features

|                                   |   |
|-----------------------------------|---|
| Rated voltage                     | 690 V AC<br>690 V DC<br>600 V AC (UL)   |
| Rated insulation voltage          | 1000 V  |
| Overvoltage category              | 4   |
| Contamination level               | 3   |
| Number of poles                   | 3-pole  |
| Cable outlet                      | Top/bottom  |
| Type of electrical connection     | Screw M10   |
| To fit manufacturer (model)       | ABB (S5 400, S5, T5, XT5, FG400, FG630)<br>Chint (NM8N-400, NM8N-630, NXM-400S, NXM-630S, NXMS-400, NXMS-630)<br>Eaton (NZM3)<br>Fuji Electric (BW400_-3)<br>Hager (X630)<br>Hyundai Electric (400AF, 400, 630AF)<br>LS Electric (400AF, TS400, TS630)<br>Mitsubishi (NF400-SW, NF630-SW)<br>OEZ (BH630)<br>Rockwell (140G-K0F3-D40, 140G-M0F3-D63)<br>Schneider (NSX400, NSX630)<br>Schrack (MC3)<br>Siemens (3VA23, 3VA24)<br>Terasaki (S400, E630, S630) |
| To fit busbar system              | RiLineX<br>RiLine60   |
| Fundamental frequency             | 50...60 Hz  |
| Ambient humidity (non-condensing) | 10...90 %   |
| To fit busbars                    | 15 x 5/10<br>20 x 5/10<br>30 x 5/10   |
| Operating temperature range       | -25 °C...55 °C  |
| Storage temperature range         | -25 °C...75 °C  |

# Features

|                              |                                 |
|------------------------------|---------------------------------|
| Dimensions                   | Width: 145 mm<br>Height: 325 mm |
| Packs of                     | 1 pc(s).                        |
| Net weight                   | 5                               |
| Gross weight                 | 5.206                           |
| Copper weight (kg per piece) | 2.64                            |
| Customs tariff number        | 85369095                        |
| EAN                          | 4028177997110                   |
| ETIM 9                       | EC001531                        |

# Approvals

|           |                    |
|-----------|--------------------|
| Approvals | UL + C-UL (listed) |
|-----------|--------------------|