


# Rittal – The System.

Faster – better – everywhere.

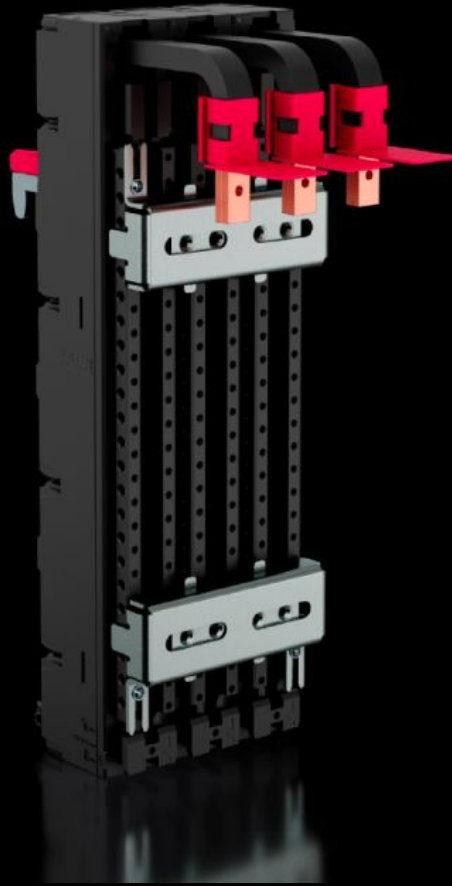

## RX 9360.600

## RiLineX CB device adapter

State: 2026-07-04 (Source: [rittal.com/ca-en](https://www.rittal.com/ca-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9360.600 - RiLineX CB device adapter

CB device adapter (3-pole, max. 160 A) for the RiLineX busbar platform and 60 mm busbar systems such as RiLine60. The device width on the busbar system is 81 mm. The "universal" version with sliding nuts offers maximum flexibility for switch installation. The adapter has tool-free snap-on mounting with semi-automatic adjustment of the rail thickness between 5 and 10 mm. Version for cable outlet at the bottom.



## Features

|                                      |  |
|--------------------------------------|--|
| Model No.                            | RX 9360.600  |
| Version                              | universal  |
| Benefits                             | Direct mounting of compact circuit breaker MCCB on the board<br>Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm<br>Quick and easy pre-assembly of standard switch types outside the control cabinet |
| Material                             | Polyamide (PA 6)<br>Fire behavior corresponding to UL 94   |
| Color                                | RAL 9005<br>RAL 35745  |
| Supply includes                      | Incl. 3 connection compartment covers  |
| Protection category IP to IEC 60 529 | IP 2XB   |
| Rated impulse withstand voltage UImp | 8 kV   |

# Features

|                                   |  |
|-----------------------------------|--|
| Rated voltage                     | 690 V AC<br>600 V AC (UL)  |
| Rated insulation voltage $U_i$    | 1,000 V  |
| Contamination level               | 3  |
| Number of poles                   | 3-pole   |
| Cable outlet                      | Bottom   |
| Type of connection (electrical)   | Box terminal   |
| Cross-section                     | 9 mm <sup>2</sup><br>6 mm <sup>2</sup>   |
| To fit manufacturer (model)       | Easily find the right device adapter with our selection guide in the Downloads area. |
| Suitable for busbar system        | RiLineX<br>RiLine60  |
| Fundamental frequency             | 50...60 Hz   |
| Ambient humidity (non-condensing) | 10...90 %  |
| Suitable for busbars              | 15 x 5/10<br>20 x 5/10<br>30 x 5/10  |
| Operating temperature range       | -25 °C...55 °C   |
| Storage temperature range         | -25 °C...75 °C   |
| Dimensions                        | Width: 82 mm<br>Height: 251.4 mm<br>Depth: 50.8 mm                                   |
| Fire load                         | 22.045 MJ/m <sup>2</sup>   |
| Packaging unit                    | 1 pc(s).   |
| Net weight                        | 0.92 kg  |
| Gross weight                      | 1.22 kg  |
| Copper weight (kg per piece)      | 0.375  |
| PCF/VE (cradle-to-gate)           | 12.73  |

# Features

---

|                       |  |
|-----------------------|--|
| Customs tariff number | 85369095   |
| ETIM 9                | EC001531   |
| Product description   | RX CB device adapter 160 A, 3-pole, version: Universal Fix, cable outlet at bottom, W: 81 mm |

---

# Approvals

---

|              |  |
|--------------|--|
| Approvals    | UL + C-UL (listed)                           |
| Explanations | Declaration of conformity<br>PCF-declaration |

---