

# Rittal – The System.

Faster – better – everywhere.



## RX 9360.798

## RiLineX component adaptor

State: 2025-09-04 (Source: [rittal.com/ca-en](https://www.rittal.com/ca-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9360.798 - RiLineX component adaptor

Component adapter 72 mm, 100 A, with pre-mounted insert nuts for standard circuit-breakers.

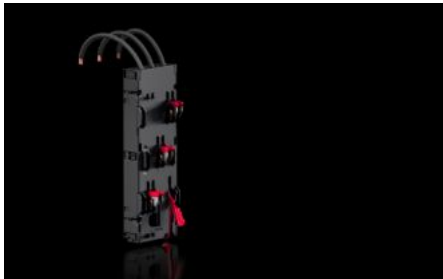

## Features

Model No.	RX 9360.798
Version	With connection cable
Benefits	For mounting equipment for top-hat rail mounting, e.g. motor starter Pre-assembled connection cable AWG 14 - 2 (16 A - 100 A) Simple connector lock for component support rails Optional component anti-slip guard Snap-on mounting and easy adjustment on busbar thickness 5/10 mm Easy mounting Coordinated accessories reduce the number of different items required
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94
Color	RAL 9005 RAL 35745
Connection cables (AWG)	AWG 4
Rated current max.	80 A
Cable outlet	Top
For bar systems with center-to-center spacing	60 mm
Number of poles	3-pole

# Features

Suitable for busbar system	RiLineX RiLine60
Dimensions	Width: 72 mm Height: 240 mm Depth: 37 mm
Suitable for busbars	15 x 5/10 20 x 5/10 30 x 5/10
Rated voltage	690 V AC 600 V AC (UL) 600 V DC (UL)
Overvoltage category	4
Contamination level	3
Standards	IEC 61 439-1/-2 UL 508
Protection category IP to IEC 60 529	IP 2XB
Operation humidity max	90 %
Operating temperature range	-5 °C...55 °C
Storage temperature range	-25 °C...75 °C
Ambient humidity (non-condensing)	10...90 %
Packaging unit	1 pc(s).
Net weight	0.7
Gross weight	0.702
Copper weight (kg per piece)	0.246
Customs tariff number	85369095
ETIM 9	EC001531

# Approvals

Approvals	UL + C-UL (listed)
Explanations	Declaration of conformity