


# Rittal – The System.

Faster – better – everywhere.

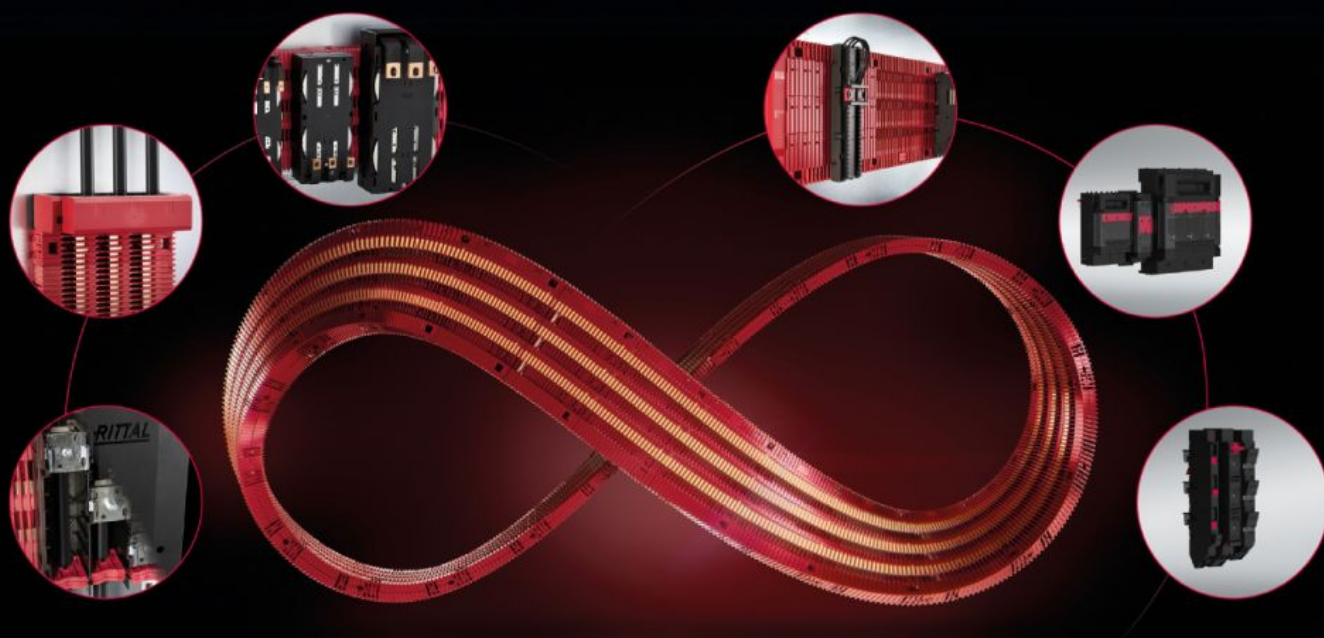

## RX 9362.250

## RiLineX NH fuse-switch disconnecter

State: 2025-10-02 (Source: [rittal.com/ca-en](https://rittal.com/ca-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9362.250 - RiLineX NH fuse-switch disconnecter

RiLineX NH fuse-switch-disconnector in size 2 for 60 mm busbar systems. The cover is lockable, sealable and features visual fuse monitoring. The safe voltage test takes place via the integrated measurement points on the cover. The NH fuse-switch-disconnecters have a park position to simplify maintenance work. Connection design with box terminal for connecting round conductors min. 120 bis max. 300 mm<sup>2</sup>. Cable outlet can be individually converted at the top or bottom.

## Features

Model No.	RX 9362.250
Benefits	Cover, lockable and sealable Voltage test through separate opening Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm Tool-free changeover of the cable outlet Park position for simplified maintenance work All variants also available with electronic fuse monitoring
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94 Contact tracks: Electrolytic copper, silver-plated
Color	RAL 9005 RAL 35745
For bar systems with center-to-center spacing	60 mm
Cable outlet	Top/bottom
Type of connection (electrical)	Box terminal
Rated operating current max.	400 A
Rated operating voltage	690 V AC
For NH size	2
Test specification	IEC 60 947-3 IEC 60 269-2 (fuse inserts)

# Features

Dimensions	Width: 209 mm Height: 299 mm Depth: 135 mm
Operating temperature range	-5 °C...35 °C
Storage temperature range	-25 °C...70 °C
Suitable for busbars	15 x 5/10 20 x 5/10 30 x 5/10
Suitable for busbar system	RiLineX RiLine60
Number of poles	3-pole
Contamination level	3
Protection category IP to IEC 60529	IP 2XB
Fire load	50.96 MJ/m <sup>2</sup>
Connection of round conductors, fine wire without wire end ferrule	35 - 240 mm <sup>2</sup>
Connection of round conductors, fine wire with wire end ferrule	35 - 240 mm <sup>2</sup>
Power dissipation (max.)	98 W
Packaging unit	1 pc(s).
Net weight	4.25
Gross weight	4.37
Copper weight (kg per piece)	1.75
Customs tariff number	85369095
ETIM 9	EC001040

## Approvals

# Approvals

---

Explanations

Declaration of conformity