


# Rittal – The System.

Faster – better – everywhere.

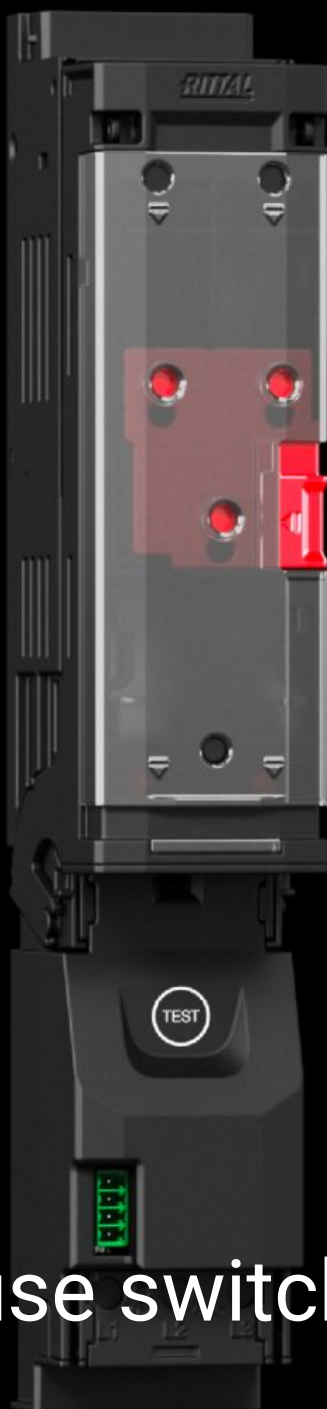

## RX 9363.425 RiLineX NH fuse switch disconnecter

State: 2025-12-08 (Source: [rittal.com/ca-en](https://www.rittal.com/ca-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9363.425 - RiLineX NH fuse switch disconnecter

RiLineX NH fuse-switch-disconnector in sizes 000 for mounting plates. The cover is lockable, sealable and features visual fuse monitoring. The safe voltage test takes place via the integrated measurement points on the cover. The NH fuse-switch-disconnectors have a park position to simplify maintenance work. Connection design with box terminal for connecting round conductors min. 1.5 bis max. 50 mm². Including electronic fuse monitoring.

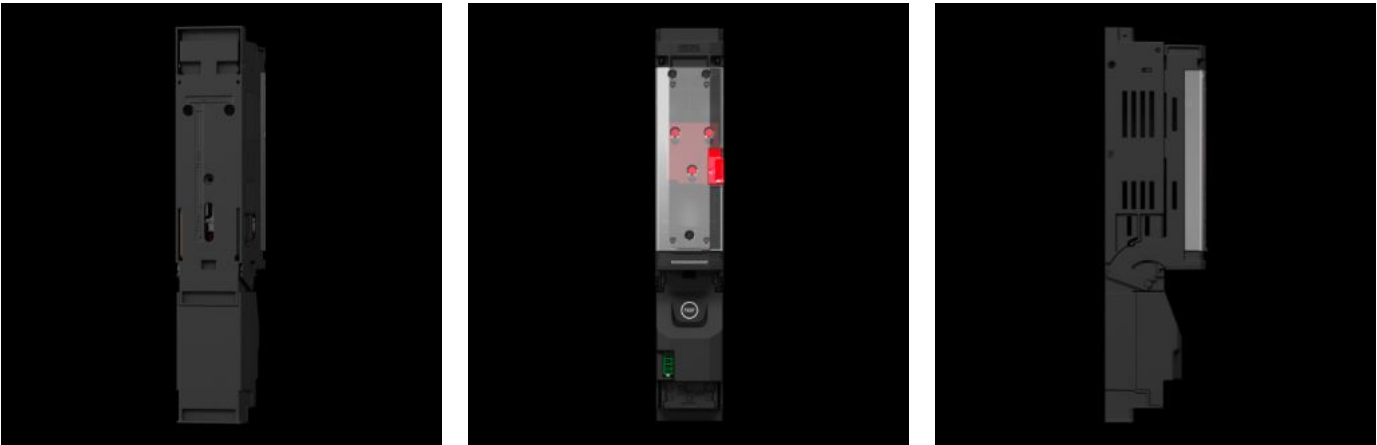

## Features

Model No.	RX 9363.425
Version	For mounting panel assembly.
Benefits	Cover, lockable and sealable Voltage test through separate opening Tool-free conversion of the cable outlet Park position for simplified maintenance work All variants also with electronic fuse monitoring
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94 Contact tracks: Electrolytic copper, silver-plated
Color	RAL 9005 RAL 35745
Supply includes	Incl. connection plug for electrical fuse monitoring
for mounting plate assembly	Yes
Cable outlet	Top/bottom

# Features

Type of connection (electrical)	Box terminal
Rated insulation voltage	1,000 kV
Rated current max.	125 A
Rated operating current max.	125 A
Rated operating voltage	690 V AC
For NH size	000
Test specification	IEC 60 947-3 IEC 60 269-2 (fuse inserts)
Dimensions	Width: 53 mm Height: 307.3 mm Depth: 80.1 mm
Connection of round conductors	1.5 - 16 mm <sup>2</sup>
Operating temperature range	-5 °C...35 °C
Storage temperature range	-25 °C...70 °C
Number of poles	3-pole
Utilization category	AC-23B (400 V/100 A) AC-21B (500 V/100 A) DC-22B (250 V/100 A)
Contamination level	3
With electronic fuse monitoring	Yes
Protection category IP to IEC 60 529	IP 2XB
Fire load	9.69 MJ/m <sup>2</sup>
Connection of round conductors, fine wire without wire end ferrule	1.5 - 16 mm <sup>2</sup>
Connection of round conductors, fine wire with wire end ferrule	1.5 - 50 mm <sup>2</sup>
Round conductor cross-section	1.5 - 16 mm <sup>2</sup>
Power dissipation (max.)	26 W
Packaging unit	1 pc(s).

# Features

Net weight	0.76
Gross weight	0.779
Copper weight (kg per piece)	0.26
Customs tariff number	85369095
ETIM 9	EC001040

# Approvals

Explanations	Declaration of conformity
--------------	---------------------------