


# Rittal – The System.

Faster – better – everywhere.

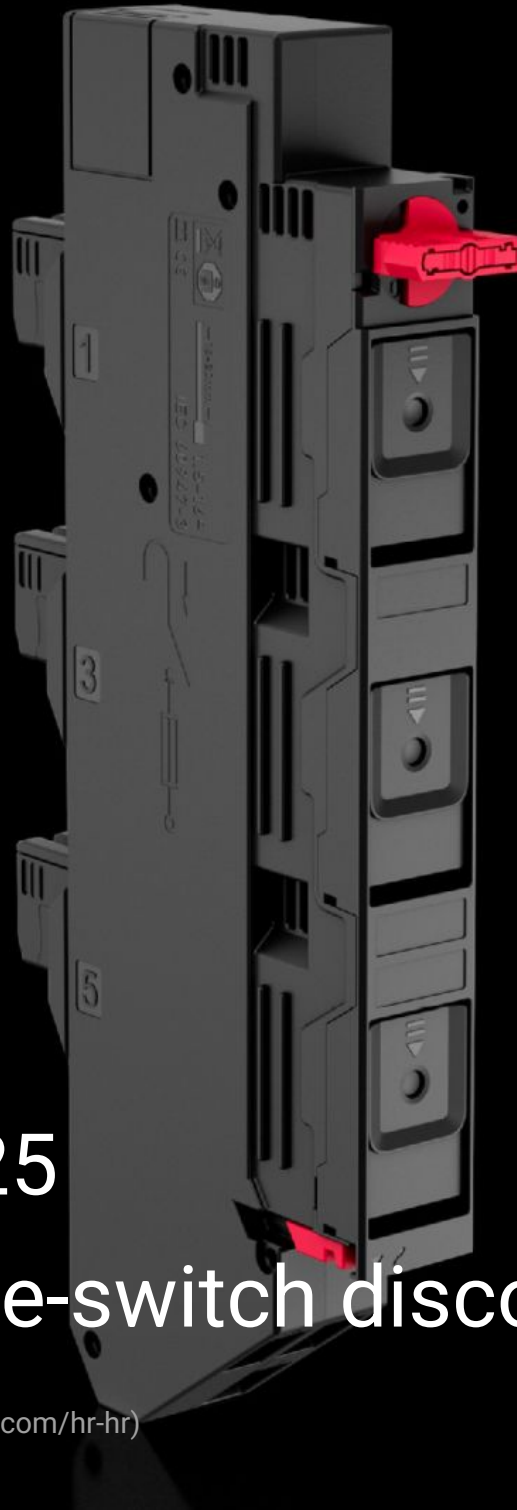

## RX 9360.825

## RiLineX fuse-switch disconnecter

State: 25.05.2026. (Source: [rittal.com/hr-hr](http://rittal.com/hr-hr))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9360.825 - RiLineX fuse-switch disconnecter D-Switch

RiLineX fuse-switch disconnecter for 60 mm busbar systems. For use with D 01 (via gauge ring) and D 02 slow fuses (max. 63 A). Also for use with 10 x 38 mm cylindrical fuses via the supplied retaining springs. Integral optical LED fuse monitoring. The switch is lockable in the on and off positions. Spring terminal blocks up to 16 mm<sup>2</sup> at an angle of 45° enable easier conductor connection. The device is suitable for tool-free snap-on mounting with semi-automatic busbar adjustment for 5 and 10 mm.

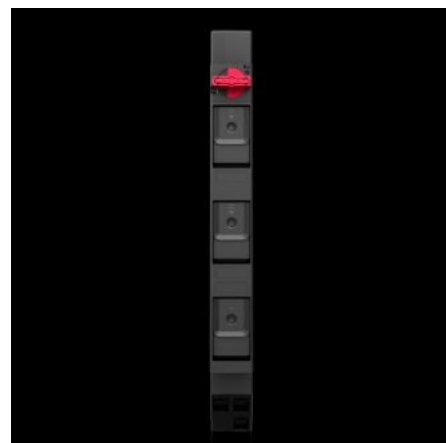

## Features

|                               |  |
|-------------------------------|--|
| Model No.                     | RX 9360.825  |
| Benefits                      | Reliable contacting of fuse inserts (without screw caps)<br>Snap-on mounting and simple adjustment for busbar thickness (5/10 mm)<br>Optical LED fuse monitoring<br>Voltage test through separate opening<br>Maintenance-free tension spring connection up to 16 mm <sup>2</sup><br>Complete contact hazard protection without any additional accessories (such as screw caps) |
| Material                      | Polyamide (PA 6)<br>Fire protection corresponding to UL 94   |
| General colour                | RAL 35745<br>RAL 9005  |
| Supply includes               | 4 fuse-switch disconnectors<br>12 reducers for D 01 fuses  |
| Type of electrical connection | Spring terminal  |

# Features

|                                      |   |
|--------------------------------------|---|
| Rated current max.                   | 63 A  |
| Rated operating voltage              | 400 V AC  |
| Cable outlet                         | Bottom  |
| Number of poles                      | 3-pole  |
| To fit busbar system                 | RiLineX<br>RiLine60                                 |
| Dimensions                           | Width: 26.8 mm<br>Height: 263 mm<br>Depth: 104.2 mm |
| Connection of round conductors       | 16 mm <sup>2</sup>                                  |
| To fit busbars                       | 15 x 5/10<br>20 x 5/10<br>30 x 5/10                 |
| Overvoltage category                 | 4   |
| Contamination level                  | 3   |
| Standards                            | IEC/DIN EN 60 947-3                                 |
| Rated insulation voltage Ui          | 800 V   |
| Heat loss max.                       | 5,5 W   |
| IP protection category to IEC 60 529 | IP 2XB  |
| Maximum operating air humidity       | 90 %  |
| Operating temperature range          | -5 °C...55 °C                                       |
| Storage temperature range            | -25 °C...75 °C                                      |
| Ambient humidity (non-condensing)    | 10...90 %   |
| Utilisation category                 | AC-22B (400 V/100 A)                                |
| Fuse inserts                         | D 02-E 18   |
| Packs of                             | 4 pc(s).  |
| Net weight                           | 1,784 kg  |

# Features

---

|                               |   |
|-------------------------------|---|
| Gross weight                  | 1,792 kg  |
| Copper weight (kg per piece)  | 0,105   |
| PCF per pack (cradle-to-gate) | 11.81   |
| Customs tariff number         | 85365080  |
| ETIM 9                        | EC001040  |
| Product description           | RiLineX fuse-switch disconnecter for 60 mm busbar systems. For use with D 01 (via gauge ring) and D 02 slow fuses (max. 63 A). Also for use with 10 x 38 mm cylindrical fuses via the supplied retaining springs. Integral optical LED fuse monitoring. The switch is lockable in the on and off positions. Spring terminal blocks up to 16 mm <sup>2</sup> at an angle of 45° enable easier conductor connection. The device is suitable for tool-free snap-on mounting with semi-automatic busbar adjustment for 5 and 10 mm. |

# Approvals

---

|              |  |
|--------------|--|
| Explanations | Declaration of conformity<br>PCF-declaration |
|--------------|--|

# Tender text

RiLineX Bus-mounting fuse base (Typ D-Switch)

Bus-mounting fuse base for slow fuse

D 01 (with gauge ring) and D 02 (E18),

10x38 (with reduction spring).

Fuse inserts are inserted via swing-out holders

Position indicator for the integrated load

break switch via signal contact.

Optical fuse monitoring with LED.

Conductor connection via tension spring terminals.

Rated voltage 400 V AC.

With UL approval

Product information

Number of poles: 3

Busbar dimensions: 15/20/30 mm x 5/10 mm

Rated current: 30 A

Connection: 1,5 - 6 mm<sup>2</sup>

Cable outlet: bottom

Dimensions: 27 mm x 263 mm x 95 mm (WxHxD)

Manufacturer: Rittal GmbH & Co. KG

Type: 9360825