


# Rittal – The System.

Faster – better – everywhere.

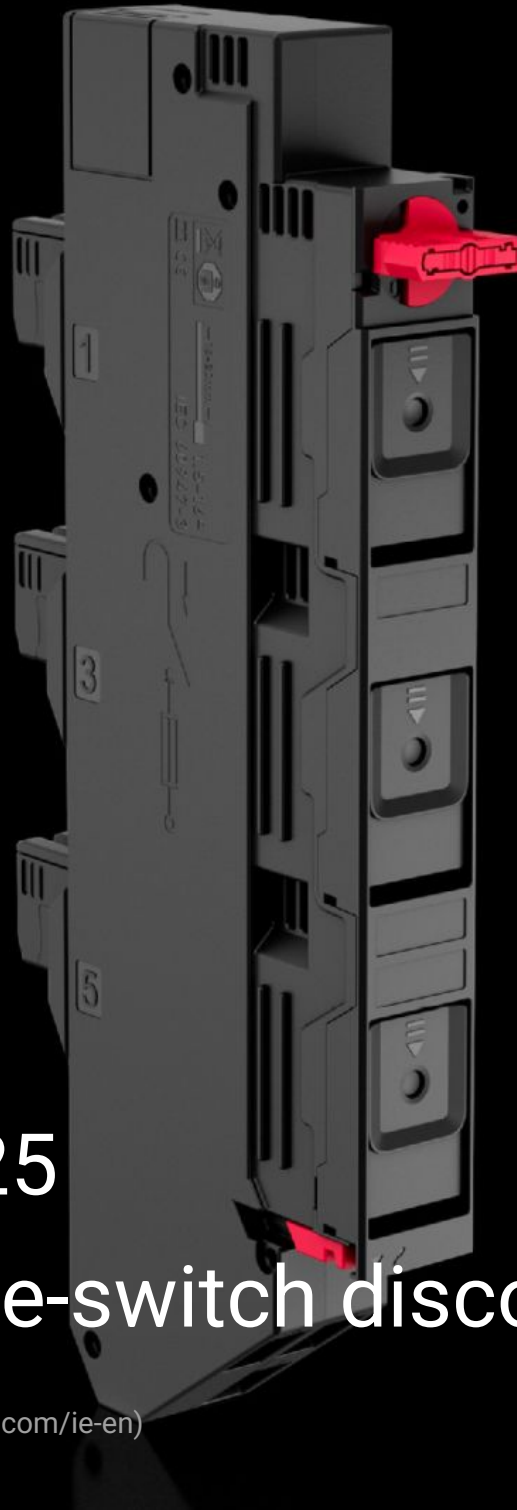

## RX 9360.825 RiLineX fuse-switch disconnecter

State: 25/05/2026 (Source: [rittal.com/ie-en](http://rittal.com/ie-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9360.825 - RiLineX fuse-switch disconnecter D-Switch

RiLineX fuse-switch disconnecter for 60 mm busbar systems. For use with D 01 (via gauge ring) and D 02 slow fuses (max. 63 A). Also for use with 10 x 38 mm cylindrical fuses via the supplied retaining springs. Integral optical LED fuse monitoring. The switch is lockable in the on and off positions. Spring terminal blocks up to 16 mm<sup>2</sup> at an angle of 45° enable easier conductor connection. The device is suitable for tool-free snap-on mounting with semi-automatic busbar adjustment for 5 and 10 mm.

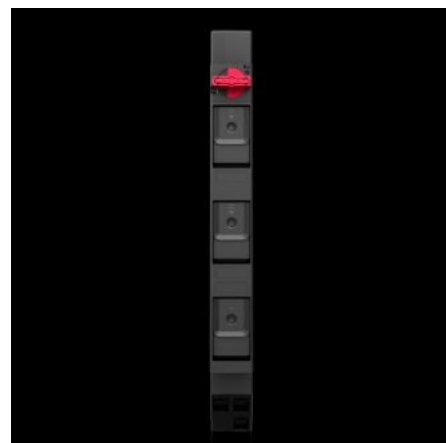

## Features

Model No.	RX 9360.825
Benefits	Reliable contacting of fuse inserts (without screw caps) Snap-on mounting and simple adjustment for busbar thickness (5/10 mm) Optical LED fuse monitoring Voltage test through separate opening Maintenance-free tension spring connection up to 16 mm <sup>2</sup> Complete contact hazard protection without any additional accessories (such as screw caps)
Material	Polyamide (PA 6) Fire protection corresponding to UL 94
General colour	RAL 35745 RAL 9005
Supply includes	4 fuse-switch disconnectors 12 reducers for D 01 fuses
Type of electrical connection	Spring terminal

# Features

Rated current max.	63 A
Rated operating voltage	400 V AC
Cable outlet	Bottom
Number of poles	3-pole
To fit busbar system	RiLineX RiLine60
Dimensions	Width: 26.8 mm Height: 263 mm Depth: 104.2 mm
Connection of round conductors	16 mm <sup>2</sup>
To fit busbars	15 x 5/10 20 x 5/10 30 x 5/10
Overvoltage category	4
Contamination level	3
Standards	IEC/DIN EN 60 947-3
Rated insulation voltage U <sub>i</sub>	800 V
Heat loss max.	5.5 W
IP protection category to IEC 60 529	IP 2XB
Maximum operating air humidity	90 %
Operating temperature range	-5 °C...55 °C
Storage temperature range	-25 °C...75 °C
Ambient humidity (non-condensing)	10...90 %
Utilisation category	AC-22B (400 V/100 A)
Fuse inserts	D 02-E 18
Packs of	4 pc(s).
Net weight	1.784 kg

# Features

---

Gross weight	1.792 kg
Copper weight (kg per piece)	0.105
PCF per pack (cradle-to-gate)	11.81
Customs tariff number	85365080
ETIM 9	EC001040
Product description	RiLineX fuse-switch disconnecter for 60 mm busbar systems. For use with D 01 (via gauge ring) and D 02 slow fuses (max. 63 A). Also for use with 10 x 38 mm cylindrical fuses via the supplied retaining springs. Integral optical LED fuse monitoring. The switch is lockable in the on and off positions. Spring terminal blocks up to 16 mm <sup>2</sup> at an angle of 45° enable easier conductor connection. The device is suitable for tool-free snap-on mounting with semi-automatic busbar adjustment for 5 and 10 mm.

# Approvals

---

Explanations	Declaration of conformity PCF-declaration
--------------	--

# Tender text

## RiLineX Bus-mounting fuse base (Typ D-Switch)

Bus-mounting fuse base for slow fuse  
D 01 (with gauge ring) and D 02 (E18).,  
10x38 (with reduction spring).  
Fuse inserts are inserted via swing-out holders  
Position indicator for the integrated load  
break switch via signal contact.  
Optical fuse monitoring with LED.  
Conductor connection via tension spring terminals.  
Rated voltage 400 V AC.  
With UL approval

Product information

Number of poles: 3

Busbar dimensions: 15/20/30 mm x 5/10 mm

Rated current: 30 A

Connection: 1,5 - 6 mm<sup>2</sup>

Cable outlet: bottom

Dimensions: 27 mm x 263 mm x 95 mm (WxHxD)

Manufacturer: Rittal GmbH & Co. KG

Type: 9360825