

Rittal – The System.

Faster – better – everywhere.



RX 9361.300

RiLineX connection adaptor

Состояние: 23.05.2026 (Источник: rittal.com/kz-ru)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9361.300 - RiLineX connection adaptor

RiLineX connection adaptor for 60 mm busbar systems. The connection adaptor is single-pole and only suitable for flat copper bars. The phase spacing is freely selectable. The unit is suitable for use with L1/L2/L3/N. The adaptor boasts an impressive compact design. Dismantling requires the use of tools. Conductors may be connected either from above or below. The terminals support full through-wiring. Mounted by simply snapping onto the RiLineX board. The adaptor is readily installed on RiLine60. It offers high levels of short-circuit protection and easy-to-fit contact hazard protection.

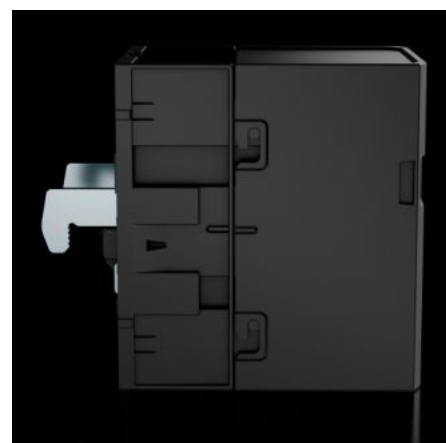

Функции

| | |
|--|--|
| Арт. № | RX 9361.300 |
| Преимущества | Mounting on the busbar system and cable connection with just one screw |
| Материал | Полиамид (PA 6) Негорючесть согласно UL 94 |
| Цвет | RAL 9005 |
| Номинальный ток (макс.) | 1 500 A |
| Номинальный ток макс. | 1 500 A |
| Rated current of laminated copper bar | 1 500 A |
| Rated current of laminated copper bar (UL) | 1 380 A |

Функции

| | |
|--|---|
| Electrical ratings UL (SCCR) | 52.5 kA - 600 V, RMS, unprotected 100 kA - 480 V, circuit breaker max. 800 A, DIVQ/7 100 kA - 600 V, Fuse Class L max. 2000 A, JDDZ/7 |
| Отвод проводов | сверху/снизу |
| Для шинных систем с межцентровым расстоянием | 60 mm |
| Количество полюсов | 1-пол. |
| Подходит для шинной системы | RiLineX RiLine60 |
| Размер | Ширина: 72,3 мм Высота: 119,4 мм Глубина: 117,4 мм |
| Клемма для гибких медных шин (Ш x В) | 50 x 20 мм |
| Подходит для шин | 15 x 10 20 x 10 30 x 10 |
| Rated voltage | 1 000 V AC 1 500 V DC 600 V AC (UL) 600 V DC (UL) |
| Категория перенапряжения | 4 |
| Степень загрязнения | 3 |
| Стандарты | IEC/EN 61439-1 UL 508 |
| Номинальное импульсное напряжение U_{imp} | 12 кВ |
| Номинальное напряжение изоляции U_i | 1 000 В |
| Степень защиты IP согл. МЭК 60529 | IP 2XB |
| Maximum operating air humidity | 90 % |

Функции

| | |
|------------------------------------|----------------|
| Диапазон рабочих температур | -5 °C...55 °C |
| Диапазон температур хранения | -25 °C...75 °C |
| Влажность воздуха (без конденсата) | 10...90 % |
| Кол-во подключений | 2 |
| Упаковка | 1 шт. |
| Вес нетто | 0,65 kg |
| Gross weight | 0,688 kg |
| PCF per pack (cradle-to-gate) | 2,69 |
| Код ТНВЭД | 85369010 |
| ETIM 9 | EC001531 |

| | |
|-------------------|---|
| Описание продукта | RiLineX connection adaptor for 60 mm busbar systems. The connection adaptor is single-pole and only suitable for flat copper bars. The phase spacing is freely selectable. The unit is suitable for use with L1/L2/L3/N. The adaptor boasts an impressive compact design. Dismantling requires the use of tools. Conductors may be connected either from above or below. The connection clamps support full through-wiring. Mounted by simply snapping onto the RiLineX board. The adaptor is readily installed on RiLine60. It boasts high levels of short-circuit protection and easy-to-fit contact hazard protection. |
|-------------------|---|

Одобрения

| | |
|------------|--|
| Одобрения | UL + C-UL (listed) |
| Объяснения | Декларация о соответствии PCF-declaration |