


Rittal – The System.

Faster – better – everywhere.

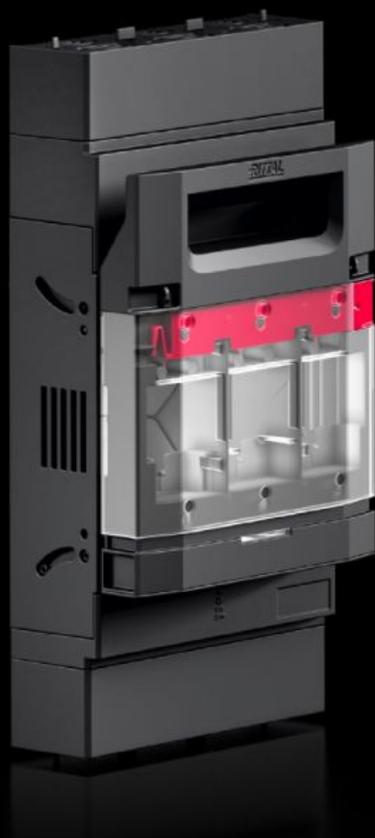

RX 9363.115

RiLineX NH fuse-switch disconnecter

Состояние: 25.02.2026 (Источник: rittal.com/kz-ru)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9363.115 - RiLineX NH fuse-switch disconnecter

RiLineX NH fuse-switch disconnecter in size 1 for mounting plates. The cover can be locked and prepared for a lead seal. It also has visual fuse monitoring. Integrated measuring points on the cover ensure safe voltage testing. NH fuse-switch disconnecters have a park position to make maintenance easier. Size M10 screw terminal connection. Includes electronic fuse monitoring.

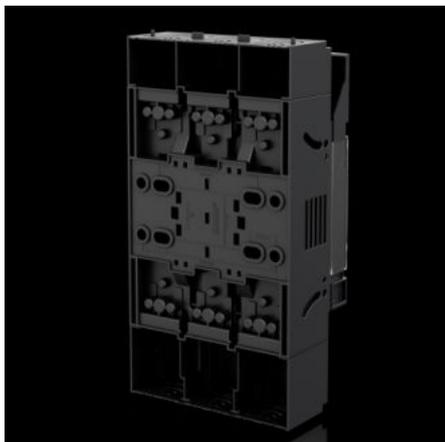

Функции

Арт. №	RX 9363.115
Исполнение	Для монтажной панели
Преимущества	Cover: can be locked and prepared for a lead seal Voltage test through separate opening Tool-free changeover of the cable outlet Park position for simpler maintenance work All variants also available with electronic fuse monitoring
Материал	Полиамид (PA 6) Негорючесть согласно UL 94 Контактные поверхности: посеребренная твердая медь
Цвет	RAL 9005 RAL 35745
Комплект поставки	Connectors for electronic fuse monitoring
for mounting plate assembly	да
Отвод проводов	сверху/снизу

Функции

Тип подключения (электрического)	Винт M10
Номинальное напряжение изоляции U_i	1 000 В
Номинальный ток макс.	250 А
Номинальный ток макс.	250 А
Номинальное рабочее напряжение	690 В AC
Для размера NH	1
Test specification	МЭК/DIN EN 60 947-3 DIN EN 60 269-2 (плавкие вставки)
Размер	Ширина: 181,8 мм Высота: 348,5 мм Глубина: 110,5 мм
Диапазон рабочих температур	-5 °C...35 °C
Диапазон температур хранения	-25 °C...70 °C
Количество полюсов	3-пол.
Utilisation category	AC-23B (400 В/100 А) AC-22B (500 В/100 А) AC-21B (690 В/100 А) DC-22B (250 В/100 А) DC-21B (440 В/100 А)
Степень загрязнения	3
с электронным контролем состояния (ЭКС)	да
Степень защиты IP согл. МЭК 60 529	IP 2XB
Fire load	37,87 MJ/m ²
Тепловыделение макс.	42 Вт
Heat loss per fuse insert (max.)	23 Вт
Упаковка	1 шт.

Функции

Вес нетто	2,4 kg
Gross weight	2,454 kg
Доля меди (кг / штук)	0,57
Код ТНВЭД	85369095
ETIM 9	EC001040
Описание продукта	RiLineX NH fuse-switch disconnecter in size 1 for mounting plates. The cover can be locked and prepared for a lead seal. It also has visual fuse monitoring. Integrated measuring points on the cover ensure safe voltage testing. NH fuse-switch disconnectors have a park position to make maintenance easier. Size M10 screw terminal connection. Includes electronic fuse monitoring.

Одобрения

Объяснения

Декларация о соответствии