

Rittal – The System.

Faster – better – everywhere.



RX 9363.310

RiLineX NH fuse-switch disconnector

State: 30/01/2026 (Source: rittal.com/nz-en)



ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL


IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

RX 9363.310 - RiLineX NH fuse-switch disconnector

RiLineX NH fuse-switch disconnector in size 3 for mounting plates. The cover can be locked and prepared for a lead seal. It also has visual fuse monitoring. Integrated measuring points on the cover ensure safe voltage testing. NH fuse-switch disconnectors have a park position to make maintenance easier. Size M10 screw terminal connection.

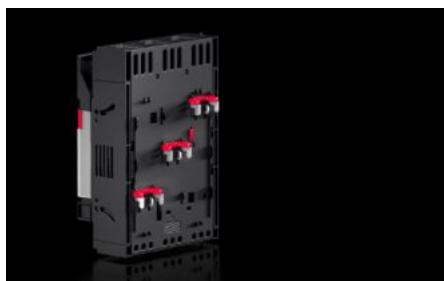

Features

Model No.	RX 9363.310
Design	For mounting plate assembly
Benefits	<p>Cover: can be locked and prepared for a lead seal</p> <p>Voltage test through separate opening</p> <p>Tool-free changeover of the cable outlet</p> <p>Park position for simpler maintenance work</p> <p>All variants also available with electronic fuse monitoring</p>
Material	<p>Polyamide (PA 6)</p> <p>Fire protection corresponding to UL 94</p> <p>Contact tracks: Electrolytic copper, silver-plated</p>
Colour	<p>RAL 9005</p> <p>RAL 35745</p>
for mounting plate assembly	Yes
Cable outlet	Top/bottom
Type of electrical connection	Screw M10
Rated insulation voltage	1,000 V
Rated current max.	630 A
Rated operating current max.	630 A
Rated operating voltage	690 V AC

Features

For NH size	3
Test specification	IEC/DIN EN 60 947-3 DIN EN 60 269-2 (fuse inserts)
Dimensions	Width: 250 mm Height: 298.5 mm Depth: 128.7 mm
Operating temperature range	-5 °C...35 °C
Storage temperature range	-25 °C...70 °C
Number of poles	3-pole
Contamination level	3
IP protection category to IEC 60 529	IP 2XB
Fire load	44.94 MJ/m ²
Power dissipation (max.)	84 W
Packs of	1 pc(s).
Net weight	3.8
Gross weight	3.882
Copper weight (kg per piece)	1.68
Customs tariff number	85369095
ETIM 9	EC001040

Approvals

Explanations	Declaration of conformity
--------------	---------------------------