

Rittal – The System.

Faster – better – everywhere.



RX 9360.824

RiLineX fuse-switch disconnecter

State: 22/05/2026 (Source: rittal.com/ro-ro)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9360.824 - RiLineX fuse-switch disconnecter D-Switch

RiLineX fuse-switch disconnecter for 60 mm busbar systems. For use with D 01 (via gauge ring) and D 02 slow fuses (max. 63 A). Also for use with 10 x 38 mm cylindrical fuses via the supplied retaining springs. Integral optical LED fuse monitoring plus electronic fuse monitoring with alarm contacts The switch is lockable in the on and off positions. Spring terminal blocks up to 16 mm² at an angle of 45° enable easier conductor connection. The device is suitable for tool-free snap-on mounting with semi-automatic busbar adjustment for 5 and 10 mm.

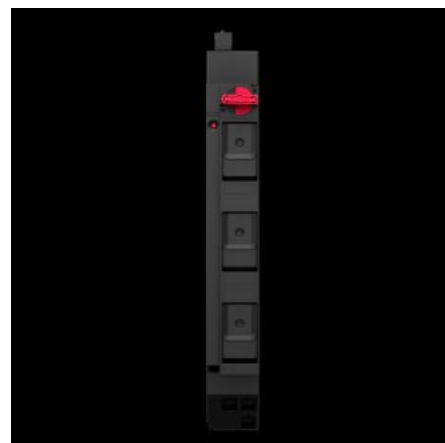

Features

| | |
|-------------------------------|--|
| Model No. | RX 9360.824 |
| Benefits | Reliable contacting of fuse inserts (without screw caps) Snap-on mounting and simple adjustment for busbar thickness (5/10 mm) Optical LED fuse monitoring Voltage test through separate opening Maintenance-free tension spring connection up to 16 mm ² Complete contact hazard protection without any additional accessories (such as screw caps) |
| Material | Polyamide (PA 6) Fire protection corresponding to UL 94 |
| General colour | RAL 35745 RAL 9005 |
| Supply includes | 4 fuse-switch disconnectors 12 reducers for D 01 fuses |
| Type of electrical connection | Spring terminal |

Features

| | |
|--------------------------------------|---|
| Rated current max. | 63 A |
| Rated operating voltage | 400 V AC |
| Cable outlet | Bottom |
| Number of poles | 3-pole |
| To fit busbar system | RiLineX RiLine60 |
| Dimensions | Width: 35.8 mm Height: 263 mm Depth: 104.2 mm |
| To fit busbars | 15 x 5/10 20 x 5/10 30 x 5/10 |
| Overvoltage category | 4 |
| Contamination level | 3 |
| Standards | IEC/DIN EN 60 947-3 |
| Rated insulation voltage U_i | 800 V |
| Heat loss max. | 5,5 W |
| IP protection category to IEC 60 529 | IP 2XB |
| Maximum operating air humidity | 90 % |
| Operating temperature range | -5 °C...55 °C |
| Storage temperature range | -25 °C...75 °C |
| Ambient humidity (non-condensing) | 10...90 % |
| Utilisation category | AC-22B (400 V/100 A) |
| Fuse inserts | D 02-E 18 |
| Packs of | 4 pc(s). |
| Net weight | 2,232 kg |
| Gross weight | 2,236 kg |

Features

| | |
|-------------------------------|--|
| Copper weight (kg per piece) | 0,105 |
| PCF per pack (cradle-to-gate) | 14.81 |
| Customs tariff number | 85365080 |
| ETIM 9 | EC001040 |
| Product description | RiLineX fuse-switch disconnecter for 60 mm busbar systems. For use with D 01 (via gauge ring) and D 02 slow fuses (max. 63 A). Also for use with 10 x 38 mm cylindrical fuses via the supplied retaining springs. Integral optical LED fuse monitoring plus electronic fuse monitoring with alarm contacts The switch is lockable in the on and off positions. Spring terminal blocks up to 16 mm ² at an angle of 45° enable easier conductor connection. The device is suitable for tool-free snap-on mounting with semi-automatic busbar adjustment for 5 and 10 mm. |

Approvals

| | |
|--------------|--|
| Explanations | Declaration of conformity PCF-declaration |
|--------------|--|

Tender text

RiLineX Bus-mounting fuse base (Typ D-Switch with EFM)

Bus-mounting fuse base for slow fuse
D 01 (with gauge ring) and D 02 (E18),
10x38 (with reduction spring).

Fuse inserts are inserted via swing-out holders.

Position indicator for the integrated load
break switch via signal contact.

Optical fuse monitoring with LED.

Conductor connection via tension spring terminals.

Rated voltage 400 V AC.

With UL approval

Product information

Number of poles: 3

Busbar dimensions: 15/20/30 mm x 5/10 mm

Rated current: 30 A

Connection: 1,5 - 6 mm²

Cable outlet: bottom

Feature: Electronic fuse monitoring

Dimensions: 36 mm x 263 mm x 115 mm (WxHxD)

Manufacturer: Rittal GmbH & Co. KG

Type: 9360824