

Rittal – The System.

Faster – better – everywhere.



RX 9360.802

RiLineX bus-mounting fuse base

State: 21/05/2026 (Source: rittal.com/rs-sr)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9360.802 - RiLineX bus-mounting fuse base

RiLineX bus-mounting fuse base for 60 mm busbar systems. For slow fuse D 01 (with gauge ring) and D 02 (E18). With optical LED fuse monitoring. For reliable fuse contacting, the device has fuse holders instead of screw caps which are lockable the open state and sealable in the closed state. A spring terminal block up to 16 mm² at an angle of 45° allows easier conductor connection. The device is suitable for tool-free, snap-on mounting and features semi-automatic busbar adjustment for 5 and 10 mm.

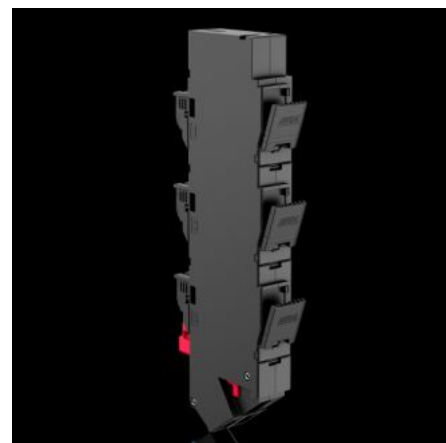

Features

| | |
|----------------------|--|
| Model No. | RX 9360.802 |
| Benefits | Reliable contacting of fuse inserts (without screw caps) Snap-on mounting and simple adjustment for busbar thickness (5/10 mm) Optical LED fuse monitoring Voltage test through separate opening Maintenance-free tension spring connection up to 16 mm ² Complete contact hazard protection without any additional accessories (such as screw caps) |
| Product modification | (secondary) |
| Material | Polyamide (PA 6) Fire protection corresponding to UL 94-V0 |
| Colour | RAL 35745 RAL 9005 |
| Supply includes | 4 bus-mounting fuse bases 12 reducers for D 01 fuses |

Features

| | |
|--------------------------------------|--|
| Type of electrical connection | Spring terminal |
| Rated current max. | 63 A |
| Rated operating voltage | 400 V AC |
| Cable outlet | Bottom |
| Number of poles | 3-pole |
| To fit busbar system | RiLineX RiLine60 |
| Dimensions | Width: 26.8 mm Height: 253.8 mm Depth: 89.8 mm |
| Connection of round conductors | 16 mm ² |
| To fit busbars | Height: 5, 10 mm |
| To fit busbars | 15 x 5/10 20 x 5/10 30 x 5/10 |
| Rated voltage | 400 V AC |
| Overvoltage category | 4 |
| Contamination level | 3 |
| Standards | IEC/DIN EN 60 947-3 |
| Rated insulation voltage Ui | 1.000 V |
| Heat loss max. | 5,5 W |
| IP protection category to IEC 60 529 | IP 2XB |
| Maximum operating air humidity | 90 % |
| Operating temperature range | -5 °C...55 °C |
| Storage temperature range | -25 °C...75 °C |
| Ambient humidity (non-condensing) | 10...90 % |
| Utilisation category | AC-21B (400 V/100 A) |

Features

| | |
|-------------------------------|---|
| Fuse inserts | D 02-E 18 |
| Packs of | 4 pc(s). |
| Net weight | 1,432 kg |
| Gross weight | 1,437 kg |
| Copper weight (kg per piece) | 0,07 |
| PCF per pack (cradle-to-gate) | 9.55 |
| Customs tariff number | 85369095 |
| ETIM 9 | EC001644 |
| Product description | RiLineX bus-mounting fuse base for 60 mm busbar systems. For slow fuse D 01 (with gauge ring) and D 02 (E18). With optical LED fuse monitoring. For reliable fuse contacting, the device has fuse holders instead of screw caps which are lockable the open state and sealable in the closed state. A spring terminal block up to 16 mm ² at an angle of 45° allows easier conductor connection. The device is suitable for tool-free, snap-on mounting and features semi-automatic busbar adjustment for 5 and 10 mm. |

Approvals

| | |
|--------------|--|
| Explanations | Declaration of conformity PCF-declaration |
|--------------|--|

Tender text

RiLineX Bus-mounting fuse base (Typ D0)

Bus-mounting fuse base for slow fuse D 01 (with gauge ring) and D 02 (E18).
Fuse inserts are inserted via swing-out holders
no screw caps are required.
Optical fuse monitoring with LED.

Conductor connection via tension spring terminals.

Rated voltage 400 V AC.

Product information

Number of poles: 3

Busbar dimensions: 15/20/30 mm x 5/10 mm

Rated current: 63 A

Connection: 1,5 - 16 mm²

Cable outlet: bottom

Dimensions: 27 mm x 254 mm x 90 mm (WxHxD)

Manufacturer: Rittal GmbH & Co. KG

Type: 9360802