

Rittal – The System.

Faster – better – everywhere.



RX 9360.625

RiLineX CB component adaptor

State: 14.5.2026 (Source: rittal.com/si-sl)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9360.625 - RiLineX CB component adaptor

RiLineX CB component adaptor (3-pole, max. 400 A) for 60 mm busbar systems. The device width is 145 mm. The "Universal" variant with U nuts offers maximum flexibility for switch mounting. The adaptor features tool-free snap-on mounting with semi-automatic adjustment of the bar thickness between 5 and 10 mm. The cable outlet is easily converted to the top or bottom to suit individual requirements.

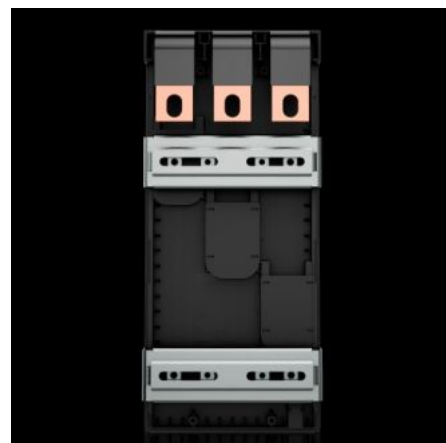

Features

| | |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Št. Modela | RX 9360.625 |
| Zasnova | univerzalno |
| Prednosti | Direct mounting of moulded-case circuit-breakers (MCCBs) on the board Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm Fast, simple pre-assembly of standard market switch types outside of the enclosure |
| Material | Poliamid (PA 6) Protipožarna zaščita v skladu z UL 94 |
| Barva | RAL 9005 RAL 35745 |
| Obseg dobave | Including 3 connection space covers, 2 cross members and assembly parts |
| IP razred zaščite po IEC 60 529 | IP 2XB |

Features

| | |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Nazivna impulzna vzdržna napetost Uimp | 8 kV |
| Rated voltage | 690 V AC 690 V DC 600 V AC (UL) |
| Rated insulation voltage Ui | 1.000 V |
| Stopnja kontaminacije | 3 |
| Število polov | 3-pole |
| Kabelska vtičnica | Top/bottom |
| Prečni prerez | 29 mm ² 10 mm ² |
| Primerno za proizvajalca (tip) | Our selection aid, available in the Downloads section, helps you to easily find a matching component adaptor. |
| Za namestitev sistema zbiralnih sponk | RiLineX RiLine60 |
| Osnovna frekvenca | 50...60 Hz |
| Vlažnost okolice (brez kondenzacije) | 10...90 % |
| Za namestitev zbiralnih sponk | 15 x 5/10 20 x 5/10 30 x 5/10 |
| Delovno temperaturno območje | -25 °C...55 °C |
| Temperaturno območje shranjevanja | -25 °C...75 °C |
| Mere | Širina: 145 mm Višina: 325,8 mm Globina: 76,4 mm |
| Paketi | 1 pc(s). |
| Neto teža | 3,6 kg |
| Bruto teža | 3,8 kg |
| Teža bakra (kg na kos) | 1,652 |

Features

| | |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Carinska tarifna številka | 85369095 |
| ETIM 9 | EC001531 |
| Opis izdelka | RiLineX CB component adaptor (3-pole, max. 400 A) for 60 mm busbar systems. The device width is 140 mm. The "Universal" variant with U nuts offers maximum flexibility for switch mounting. The adaptor features tool-free snap-on mounting. The cable outlet is easily converted to the top or bottom to suit individual requirements. |

Approvals

| | |
|--------------|----------------------------------------------|
| Approvals | UL + C-UL (listed) |
| Explanations | Declaration of conformity PCF-declaration |