

**Rittal – The System.**

Faster – better – everywhere.



**RX 9360.625**

**RiLineX CB component adaptor**

State: 6.7.2026 (Source: [rittal.com/si-sl](http://rittal.com/si-sl))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9360.625 - RiLineX CB component adaptor

RiLineX CB component adaptor (3-pole, max. 400 A) for 60 mm busbar systems. The device width is 145 mm. The "Universal" variant with U nuts offers maximum flexibility for switch mounting. The adaptor features tool-free snap-on mounting with semi-automatic adjustment of the bar thickness between 5 and 10 mm. The cable outlet is easily converted to the top or bottom to suit individual requirements.

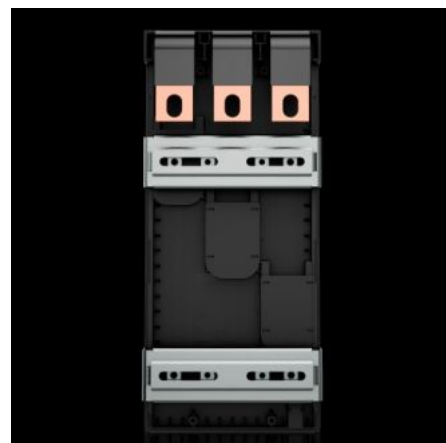

## Features

Št. Modela	RX 9360.625
Zasnova	univerzalno
Prednosti	Direct mounting of moulded-case circuit-breakers (MCCBs) on the board Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm Fast, simple pre-assembly of standard market switch types outside of the enclosure
Material	Poliamid (PA 6) Protipožarna zaščita v skladu z UL 94
Barva	RAL 9005 RAL 35745
Obseg dobave	Including 3 connection space covers, 2 cross members and assembly parts
IP razred zaščite po IEC 60 529	IP 2XB

# Features

Nazivna impulzna vzdržna napetost U <sub>imp</sub>	8 kV
Rated voltage	690 V AC 600 V AC (UL)
Rated insulation voltage U <sub>i</sub>	1.000 V
Stopnja kontaminacije	3
Število polov	3-pole
Kabelska vtičnica	Top/bottom
Vrsta električne povezave	Screw M10
Prečni prerez	29 mm <sup>2</sup> 10 mm <sup>2</sup>
Primerno za proizvajalca (tip)	Our selection aid, available in the Downloads section, helps you to easily find a matching component adaptor.
Za namestitev sistema zbiralnih sponk	RiLineX RiLine60
Osnovna frekvenca	50...60 Hz
Vlažnost okolice (brez kondenzacije)	10...90 %
Za namestitev zbiralnih sponk	15 x 5/10 20 x 5/10 30 x 5/10
Delovno temperaturno območje	-25 °C...55 °C
Temperaturno območje shranjevanja	-25 °C...75 °C
Mere	Širina: 145 mm Višina: 325,8 mm Globina: 76,4 mm
Fire load	16,043 MJ/m <sup>2</sup>
Paketi	1 pc(s).
Neto teža	3,6 kg
Bruto teža	3,8 kg

# Features

---

Teža bakra (kg na kos)	1,652
PCF na paket (od zibelke do vrat)	21,11
Carinska tarifna številka	85369095
ETIM 9	EC001531
Opis izdelka	RiLineX CB component adaptor (3-pole, max. 400 A) for 60 mm busbar systems. The device width is 140 mm. The "Universal" variant with U nuts offers maximum flexibility for switch mounting. The adaptor features tool-free snap-on mounting. The cable outlet is easily converted to the top or bottom to suit individual requirements.

# Approvals

---

Approvals	UL + C-UL (listed)
Explanations	Declaration of conformity PCF-declaration