


Rittal – The System.

Faster – better – everywhere.

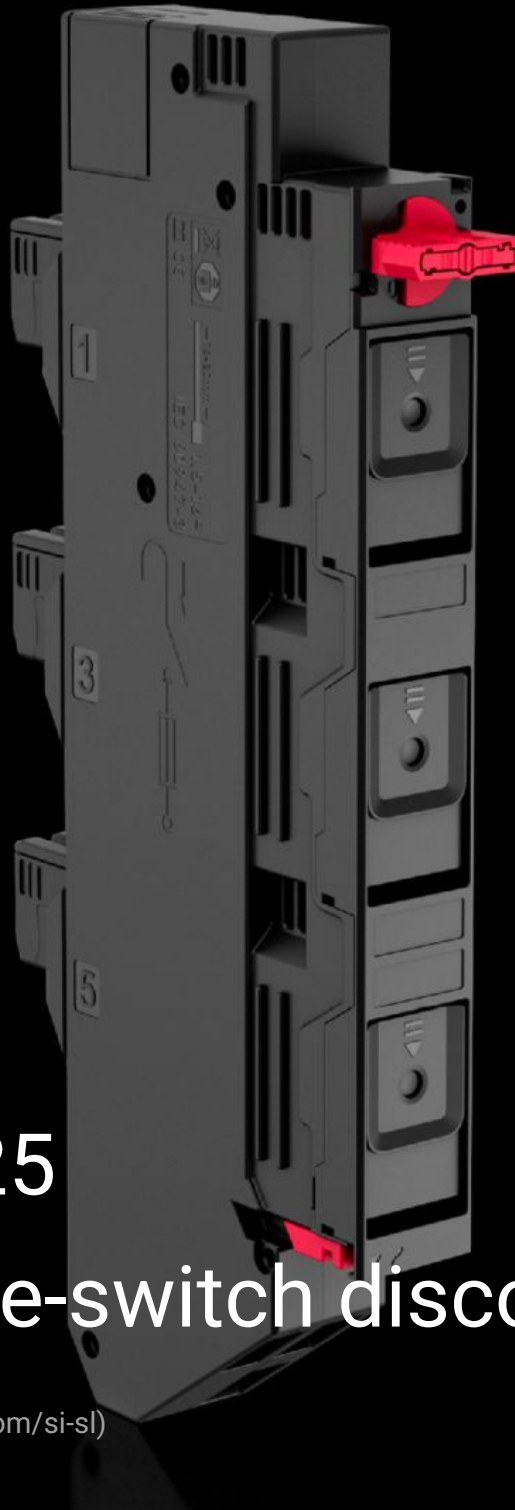

RX 9360.825

RiLineX fuse-switch disconnecter

State: 25.5.2026 (Source: rittal.com/si-sl)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9360.825 - RiLineX fuse-switch disconnecter D-Switch

RiLineX fuse-switch disconnecter for 60 mm busbar systems. For use with D 01 (via gauge ring) and D 02 slow fuses (max. 63 A). Also for use with 10 x 38 mm cylindrical fuses via the supplied retaining springs. Integral optical LED fuse monitoring. The switch is lockable in the on and off positions. Spring terminal blocks up to 16 mm² at an angle of 45° enable easier conductor connection. The device is suitable for tool-free snap-on mounting with semi-automatic busbar adjustment for 5 and 10 mm.

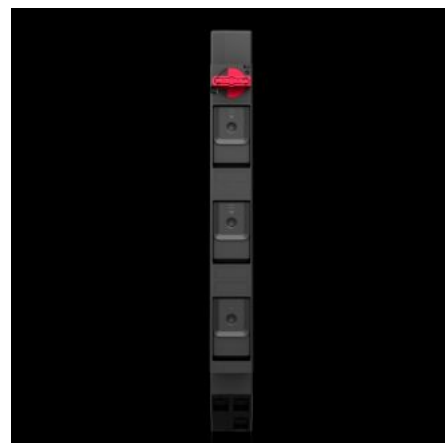

Features

Št. Modela	RX 9360.825
Prednosti	Reliable contacting of fuse inserts (without screw caps) Snap-on mounting and simple adjustment for busbar thickness (5/10 mm) Optical LED fuse monitoring Voltage test through separate opening Maintenance-free tension spring connection up to 16 mm ² Complete contact hazard protection without any additional accessories (such as screw caps)
Material	Poliamid (PA 6) Protipožarna zaščita v skladu z UL 94
General colour	RAL 35745 RAL 9005
Obseg dobave	4 fuse-switch disconnectors 12 reducers for D 01 fuses
Vrsta električne povezave	Spring terminal

Features

Maks. nazivni tok	63 A
Nazivna delovna napetost	400 V AC
Kabelska vtičnica	Bottom
Število polov	3-pole
Za namestitev sistema zbiralnih sponk	RiLineX RiLine60
Mere	Širina: 26,8 mm Višina: 263 mm Globina: 104,2 mm
Priklop okroglih vodnikov	16 mm ²
Za namestitev zbiralnih sponk	15 x 5/10 20 x 5/10 30 x 5/10
Kategorija prenapetosti	4
Stopnja kontaminacije	3
Standardi	IEC/DIN EN 60 947-3
Rated insulation voltage Ui	800 V
Izguba toplote maks.	5,5 W
IP razred zaščite po IEC 60 529	IP 2XB
Maximum operating air humidity	90 %
Delovno temperaturno območje	-5 °C...55 °C
Temperaturno območje shranjevanja	-25 °C...75 °C
Vlažnost okolice (brez kondenzacije)	10...90 %
Utilisation category	AC-22B (400 V/100 A)
Vložki varovalk	D 02-E 18
Paketi	4 pc(s).
Neto teža	1,784 kg

Features

Bruto teža	1,792 kg
Teža bakra (kg na kos)	0,105
PCF na paket (od zibelke do vrat)	11,81
Carinska tarifna številka	85365080
ETIM 9	EC001040
Opis izdelka	RiLineX fuse-switch disconnecter for 60 mm busbar systems. For use with D 01 (via gauge ring) and D 02 slow fuses (max. 63 A). Also for use with 10 x 38 mm cylindrical fuses via the supplied retaining springs. Integral optical LED fuse monitoring. The switch is lockable in the on and off positions. Spring terminal blocks up to 16 mm ² at an angle of 45° enable easier conductor connection. The device is suitable for tool-free snap-on mounting with semi-automatic busbar adjustment for 5 and 10 mm.

Approvals

Explanations	Declaration of conformity PCF-declaration
--------------	--