


Rittal – The System.

Faster – better – everywhere.

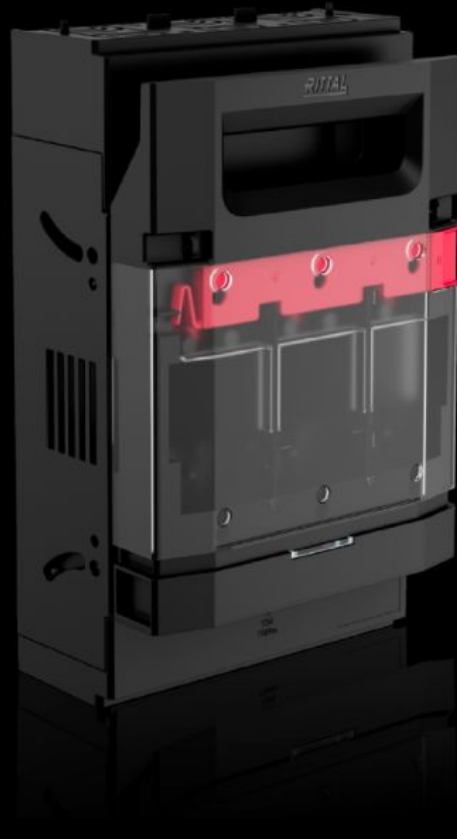

RX 9362.422

RiLineX NH fuse-switch disconnecter

State: 22.5.2026 (Source: rittal.com/si-sl)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9362.422 - RiLineX NH fuse-switch disconnecter

RiLineX NH fuse-switch disconnecter in size 000 for 60 mm busbar systems. The cover can be locked and prepared for a lead seal. It also has visual fuse monitoring. Integrated measuring points on the cover ensure safe voltage testing. NH fuse-switch disconnecters have a park position to make maintenance easier. Box terminal connection to connect round conductors ranging from min. 1.5 to max. 50 mm². Cable outlet at the top.

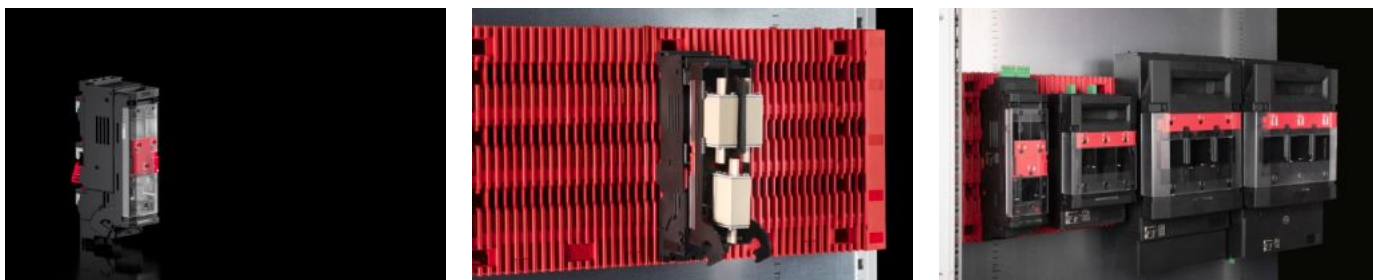

Features

Št. Modela	RX 9362.422
Zasnova	For 60 mm busbar systems
Prednosti	Cover: can be locked and prepared for a lead seal Voltage test through separate opening Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm Tool-free changeover of the cable outlet Park position for simpler maintenance work All variants also available with electronic fuse monitoring
Material	Poliamid (PA 6) Protipožarna zaščita v skladu z UL 94 Kontakti: elektrolitski baker s srebrno prevleko
Barva	RAL 9005 RAL 35745
Za sisteme palic z razmakom med središči	60 mm
Kabelska vtičnica	Top
Vrsta električne povezave	Box terminal
Vložki varovalk	NH 000

Features

Rated insulation voltage Ui	1.000 V
Maks. nazivni tok	125 A
Nazivna delovna napetost	690 V AC
Za velikost NH	000
Test specification	IEC/DIN EN 60 947-3 DIN EN 60 269-2 (talilne varovalke)
Mere	Širina: 53 mm Višina: 212 mm Globina: 103 mm
Delovno temperaturno območje	-5 °C...35 °C
Temperaturno območje shranjevanja	-25 °C...70 °C
Za namestitev zbiralnih sponk	15 x 5/10 20 x 5/10 30 x 5/10
Za namestitev sistema zbiralnih sponk	RiLineX RiLine60
Število polov	3-pole
Utilisation category	AC-23B (400 V/100 A) AC-22B (500 V/100 A) AC-21B (690 V/100 A) DC-22B (250 V/100 A)
Stopnja kontaminacije	3
IP razred zaščite po IEC 60 529	IP 2XB
Fire load	10,84 MJ/m ²
Priklop okroglih vodnikov, fina žica brez tulca	1,5 - 16 mm ²
Priklop okroglih vodnikov, fino pletenih z žičnimi tulci	1,5 - 50 mm ²
Izguba toplote maks.	36 W
Heat loss per fuse insert (max.)	9 W

Features

Paketi	1 pc(s).
Neto teža	0,65 kg
Bruto teža	0,706 kg
Teža bakra (kg na kos)	0,475
PCF na paket (od zibelke do vrat)	4,53
Carinska tarifna številka	85369095
ETIM 9	EC001040
Opis izdelka	RiLineX NH fuse-switch disconnecter in size 000 for 60 mm busbar systems. The cover can be locked and prepared for a lead seal. It also has visual fuse monitoring. Integrated measuring points on the cover ensure safe voltage testing. NH fuse-switch disconnecters have a park position to make maintenance easier. Box terminal connection to connect round conductors ranging from min. 1.5 to max. 50 mm ² . Cable outlet at the top.

Approvals

Approvals	CQC-CCC
Explanations	Declaration of conformity PCF-declaration