


Rittal – The System.

Faster – better – everywhere.

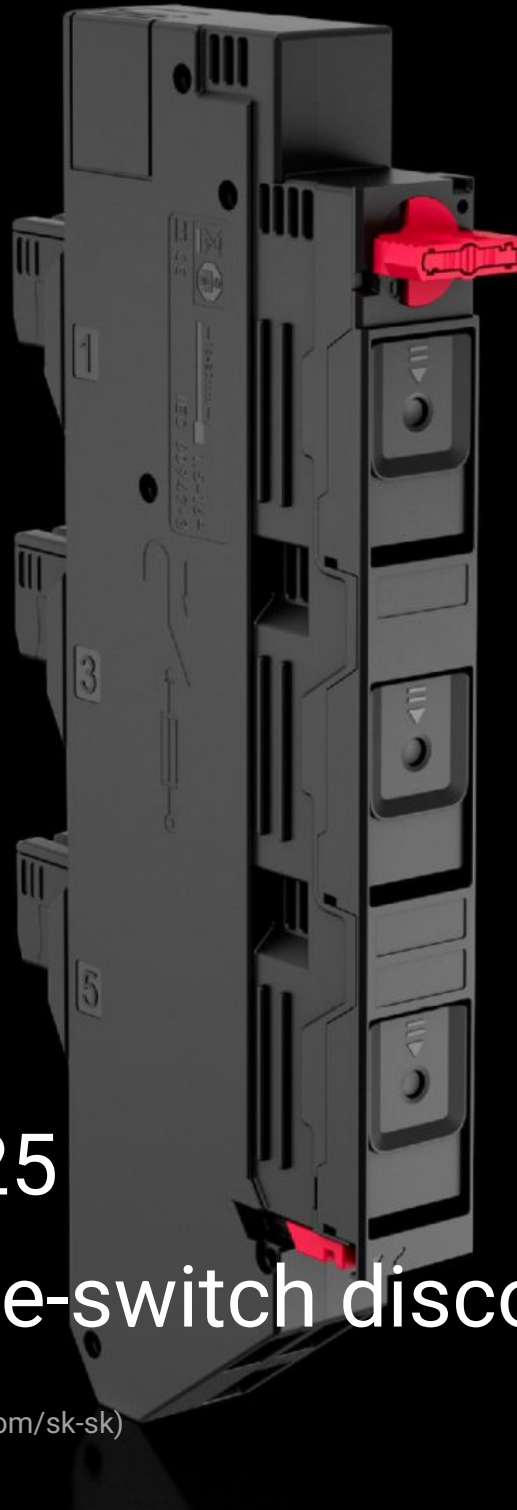

RX 9360.825

RiLineX fuse-switch disconnecter

State: 25.5.2026 (Source: rittal.com/sk-sk)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9360.825 - RiLineX fuse-switch disconnecter D-Switch

RiLineX fuse-switch disconnecter for 60 mm busbar systems. For use with D 01 (via gauge ring) and D 02 slow fuses (max. 63 A). Also for use with 10 x 38 mm cylindrical fuses via the supplied retaining springs. Integral optical LED fuse monitoring. The switch is lockable in the on and off positions. Spring terminal blocks up to 16 mm² at an angle of 45° enable easier conductor connection. The device is suitable for tool-free snap-on mounting with semi-automatic busbar adjustment for 5 and 10 mm.

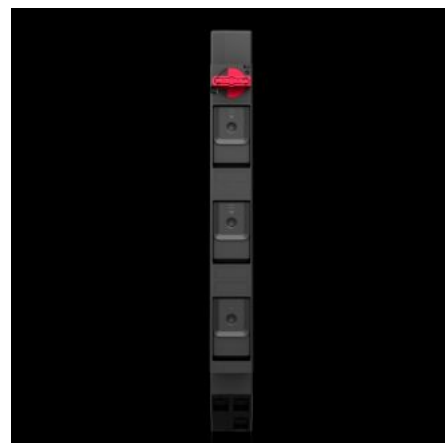

Features

| | |
|----------------------------------|--|
| Obj. č. | RX 9360.825 |
| Výhody | Reliable contacting of fuse inserts (without screw caps) Snap-on mounting and simple adjustment for busbar thickness (5/10 mm) Optical LED fuse monitoring Voltage test through separate opening Maintenance-free tension spring connection up to 16 mm ² Complete contact hazard protection without any additional accessories (such as screw caps) |
| Materiál | Polyamid (PA 6) Ochrana proti požiaru zodpovedá UL 94 |
| General colour | RAL 35745 RAL 9005 |
| Rozsah dodávky | 4 fuse-switch disconnectors 12 reducers for D 01 fuses |
| Spôsob (elektrického) pripojenia | Spring terminal |

Features

| | |
|---|--|
| Menovitý prúd max. | 63 A |
| Menovité prevádzkové napätie | 400 V AC |
| Vývod vodičov | Bottom |
| Počet pólov | 3-pole |
| Vhodné pre prípojnicový systém | RiLineX RiLine60 |
| Rozmery | Šírka: 26,8 mm Výška: 263 mm Hĺbka: 104,2 mm |
| Pripojenie okrúhlych vodičov | 16 mm ² |
| Vhodné pre prípojnice | 15 x 5/10 20 x 5/10 30 x 5/10 |
| Trieda prepätia | 4 |
| Stupeň znečistenia | 3 |
| Normy | IEC/DIN EN 60 947-3 |
| Rated insulation voltage Ui | 800 V |
| Stratový výkon max. | 5,5 W |
| Stupeň krytia IP podľa normy IEC 60 529 | IP 2XB |
| Maximum operating air humidity | 90 % |
| Rozsah prevádzkových teplôt | -5 °C...55 °C |
| Rozsah skladovacích teplôt | -25 °C...75 °C |
| Vlhkosť vzduchu (nekondenzujúca) | 10...90 % |
| Utilisation category | AC-22B (400 V/100 A) |
| Poistkové vložky | D 02-E 18 |
| Balenie | 4 pc(s). |
| Netto hmotnosť | 1,784 kg |
| Brutto hmotnosť | 1,792 kg |

Features

| | |
|-------------------------------|---|
| Podiel medi (kg / ks) | 0,105 |
| PCF per pack (cradle-to-gate) | 11,81 |
| Číslo colnej sadzby | 85365080 |
| ETIM 9 | EC001040 |
| Popis výrobku | RiLineX fuse-switch disconnecter for 60 mm busbar systems. For use with D 01 (via gauge ring) and D 02 slow fuses (max. 63 A). Also for use with 10 x 38 mm cylindrical fuses via the supplied retaining springs. Integral optical LED fuse monitoring. The switch is lockable in the on and off positions. Spring terminal blocks up to 16 mm ² at an angle of 45° enable easier conductor connection. The device is suitable for tool-free snap-on mounting with semi-automatic busbar adjustment for 5 and 10 mm. |

Approvals

| | |
|--------------|--|
| Explanations | Declaration of conformity PCF-declaration |
|--------------|--|