


# Rittal – The System.

Faster – better – everywhere.



## RX 9360.512

## RiLineX CB component adaptor

State: 20/08/2025 (Source: [rittal.com/uae-en](https://www.rittal.com/uae-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9360.512 - RiLineX CB component adaptor

RiLineX CB component adaptor (3-pole, max. 250 A) for 60 mm busbar systems. The device width is 105 mm. The "Easy-Fix" concept allows adaptors and switches to be mounted independently of one another. This concept is available for all popular manufacturers. The adaptor features tool-free snap-on mounting with semi-automatic adjustment of the bar thickness between 5 and 10 mm. Version for cable outlet at the bottom.

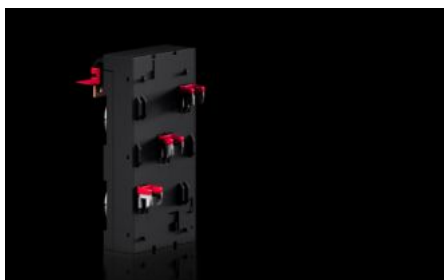

## Features

Model No.	RX 9360.512
Design	Easy Fix
Benefits	Direct mounting of moulded-case circuit-breakers (MCCBs) on the board Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm Fast, simple pre-assembly of standard market switch types outside of the enclosure
Material	Polyamide (PA 6) Fire protection corresponding to UL 94
Colour	RAL 9005 RAL 35745
Supply includes	3 connection space covers
IP protection category to IEC 60 529	IP 2XB
Rated current max.	250 A
Rated current (UL)	210 A
Rated impulse withstand voltage Uimp	12 kV

# Features

Rated voltage	690 V AC 690 V DC 600 V AC (UL)
Rated insulation voltage	1,000 V
Overvoltage category	4
Contamination level	3
Number of poles	3-pole
Cable outlet	Bottom
Type of electrical connection	Screw M8
To fit manufacturer (model)	ABB (S3 150, S3 225, S3, T3, T4, XT3, XT4, FE160, FE250) Chint (NM8N-250, NM1-250H, NXM-250S, NXMS-250) Eaton (LZMB2-A160, LZMB2-A250) Fuji Electric (BW160_-3P, BW250_-3) Hager (P250) Himel (HDM3-160, HDM3-250, HDM3L-160, HDM3L-250) Hyundai Electric (160, 250AF) Legrand (DPX250, DPX <sup>3</sup> 250) LS Electric (250AF, TS250) Mitsubishi (NF125-SGV, NF160-SGV, NF250-SV) OEZ (BD250) Rockwell (140G-J0F3-D25) Sassin (3SM8N-225, 3SM8L-225) Schneider (EZC250H, NS100, NS160, NS250, NSX100, NSX160, NSX250, GV5) Schrack (MC2) Siemens (3VA20, 3VA21, 3VA22, 3VT2, 3RV1063, 3RV1363, 3RV1364, VL160/3VL2) Terasaki (S160, S250, H250)
To fit busbar system	RiLineX RiLine60
Fundamental frequency	50...60 Hz
Ambient humidity (non-condensing)	10...90 %

## Features

To fit busbars	15 x 5/10 20 x 5/10 30 x 5/10
Operating temperature range	-25 °C...55 °C
Storage temperature range	-25 °C...75 °C
Dimensions	Width: 105 mm Height: 252 mm Depth: 63 mm
Packs of	1 pc(s).
Net weight	1.7
Gross weight	1.792
Copper weight (kg per piece)	0.608
Customs tariff number	85369095
EAN	4028177997134
ETIM 9	EC001531

## Approvals

Approvals	UL + C-UL (listed)
-----------	--------------------