


Rittal – The System.

Faster – better – everywhere.

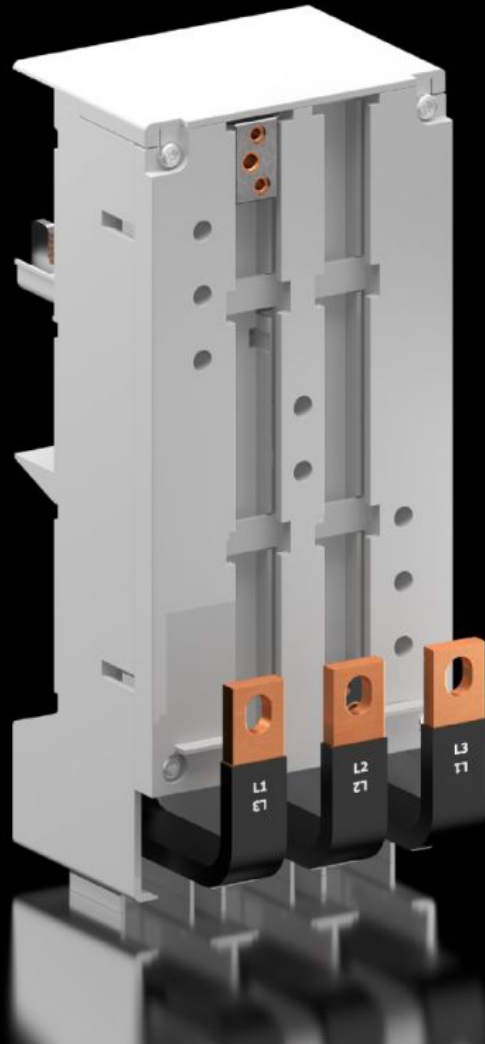

SV 9345.600 Circuit-Breaker Component Adaptors

State: 4/23/2026 (Source: rittal.com/us-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



SV 9345.600 - Circuit-Breaker Component Adaptors 3-pole

Circuit breaker adaptor for the universal, simplified assembly of circuit-breakers.



Features

Model No.	SV 9345.600
Material	Polyamide Fire protection corresponding to UL 94-V0
Color	RAL 7035
Supply includes	Connection straps Sliding Blocks
Rated current max.	250 A
Rated operating voltage	690 V, 3~
Electrical UL ratings (SCCR)	65 kA - 480 V, circuit breaker max. 250 A, DIVQ/7
Cable outlet	Top
For bar systems with center-to-center spacing	60 mm
Note	Cable outlet: Switch outlet or as outgoing cable from the switchgear The technical data may vary for UL applications.
Number of poles	3-pole
Dimensions	Width: 105 mm Height: 240 mm Width: 4.13 " Height: 9.45 "

Features

Suitable for busbars	Height: 5, 10 mm Height: 0.2, 0.39 "
To fit manufacturer (model)	ABB (S3, T3, T4/320 A, T3 UL, T4 UL, XT3, XT4) Allen Bradley (140U-J) Eaton (NZM2, NZM2 UL, BZM B2) GE (FE160, FE250, FD160) Legrand (DPX 250) Mitsubishi (NF125-SGW/HGW, NF160-SGW/HGW) OEZ (BD250N, BD250S) Schneider Electric (NS(X)100, NS(X)160, NS(X)250, GV7, NSF150, NSF250) Schrack (MC2) Siemens (VL150(X) UL, VL160(X), VL250, VL250 UL, 3RV10 63, 3RV13 63, 3RV13 64, 3VT2, 3VA12/20/21/22, 3VA52/61/62) Terasaki (H125, L125, H160, L160, S160, E250, H250, L250)
Approvals	UL
Packaging unit	1 pc(s).
Net weight	1.426 kg
Gross weight	1.509 kg
Copper weight (kg per piece)	0.77
Customs tariff number	85369095
ETIM 9	EC001531
ECLASS 8.0	27370304
Product description	SV Circuit-breaker component adaptor, 250 A, 690 V, 3-pole, cable outlet top, with connection straps

Approvals

Approvals	ABS DNV-GL Lloyds Register of Shipping UL + C-UL (listed)
-----------	--

Approvals

Explanations

Declaration of conformity

Declaration of conformity UK