

# Rittal – The System.

Faster – better – everywhere.



## RX 9360.625

## RiLineX CB device adapter

State: 7/4/2026 (Source: [rittal.com/us-en](http://rittal.com/us-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9360.625 - RiLineX CB device adapter

RiLineX CB device adapter (3-pole, max. 400 A) for 60 mm busbar systems. The device width is 145 mm. The "universal" version with sliding nuts offers maximum flexibility for switch installation. The adapter has tool-free snap-on mounting with semi-automatic adjustment of the rail thickness between 5 and 10 mm. The cable outlet can be adapted to individual requirements by simply converting the outlet at the bottom or top.

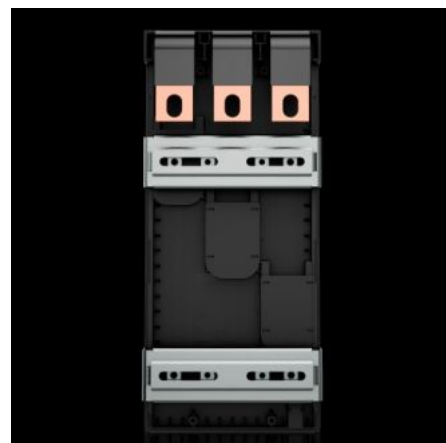

## Features

Model No.	RX 9360.625
Version	universal
Benefits	Direct mounting of compact circuit breaker MCCB on the board Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm Quick and easy pre-assembly of standard switch types outside the control cabinet
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94
Color	RAL 9005 RAL 35745
Supply includes	Incl. 3 connection compartment covers, 2 crossbars and fastening material
Protection category IP to IEC 60529	IP 2XB

# Features

Rated impulse withstand voltage U <sub>Imp</sub>	8 kV
Rated voltage	690 V AC 600 V AC (UL)
Rated insulation voltage U <sub>i</sub>	1,000 V
Contamination level	3
Number of poles	3-pole
Cable outlet	Top/bottom
Type of connection (electrical)	Screw M10
Cross-section	29 mm <sup>2</sup> 10 mm <sup>2</sup>
To fit manufacturer (model)	Easily find the right device adapter with our selection guide in the Downloads area.
Suitable for busbar system	RiLineX RiLine60
Fundamental frequency	50...60 Hz
Ambient humidity (non-condensing)	10...90 %
Suitable for busbars	15 x 5/10 20 x 5/10 30 x 5/10
Operating temperature range	-25 °C...55 °C -13 °F...131 °F
Storage temperature range	-25 °C...75 °C -13 °F...167 °F
Dimensions	Width: 145 mm Height: 325.8 mm Depth: 76.4 mm Width: 5.71 " Height: 12.8 " Depth: 3.01 "
Fire load	16.043 MJ/m <sup>2</sup>

# Features

---

Packaging unit	1 pc(s).
Net weight	3.6 kg
Gross weight	3.8 kg
Copper weight (kg per piece)	1.652
PCF/VE (cradle-to-gate)	21.11
Customs tariff number	85369095
ETIM 9	EC001531
Product description	RX CB device adapter 400 A, 3-pole, version: Universal Fix, W: 140 mm

# Approvals

---

Approvals	UL + C-UL (listed)
Explanations	Declaration of conformity PCF-declaration