Rittal – The System.

Faster – better – everywhere.



RX 9362.036

RiLineX NH fuse switch disconnector


State: 11/2/2026 (Source: www.rittal.com/us-en)

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

RX 9362.036 - RiLineX NH fuse switch disconnector

RiLineX NH fuse switch disconnectors, size 00, for 60 mm busbar systems. The cover can be locked, sealed and has visual fuse monitoring. Safe voltage testing is carried out via integrated measuring points on the cover. The NH fuse switch disconnectors have a park position to make the maintenance work easier. Connection design with frame terminal for connecting round conductors, min. 1.5 to max. 95 mm². Cable outlet can be individually configured to be at the top or bottom. Includes electronic fuse monitoring. Suitable for voltage range between 180 and 400 V.

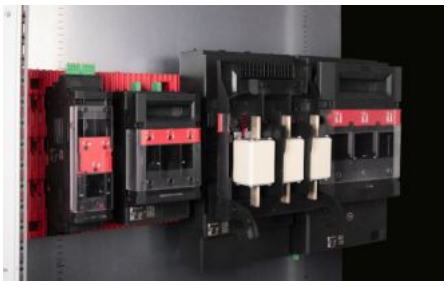





Features

Model No.	RX 9362.036
Version	For 60 mm busbar systems
Benefits	Cover, lockable and sealable Voltage test through separate opening Tool-free conversion of the cable outlet Park position for simplified maintenance work
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94 Contact tracks: Electrolytic copper, silver-plated
Color	RAL 9005 RAL 35745
For bar systems with center-to-center spacing	60 mm
Cable outlet	Top/bottom

© Rittal 2026

Features

Type of connection (electrical)	Box terminal
Rated insulation voltage Ui	1,000 V
Rated operating voltage	1000 V AC
For NH size	00
Test specification	IEC 60 947-3 IEC 60 269-2 (fuse inserts)
Dimensions	Width: 106 mm Height: 230 mm Depth: 105 mm Width: 4.17 ″ Height: 9.06 ″ Depth: 4.13 ″
Operating temperature range	-5 °C...35 °C 23 °F...95 °F
Storage temperature range	-25 °C...70 °C -13 °F...158 °F
Suitable for busbars	15 x 5/10 20 x 5/10 30 x 5/10
Number of poles	3-pole
Utilization category	AC-23B (400 V/160 A) AC-22B (500 V/160 A) AC-21B (690 V/160 A) AC-21B (800 V/63 A) AC-20B (1000 V/160 A) DC-22B (250 V/160 A) DC-21B (440 V/63 A) DC-20B (800 V/160 A) DC-20B (1000 V/160 A)
Contamination level	3
With electronic fuse monitoring	Yes
Protection category IP to IEC 60 529	IP 20
Fire load	16.6 MJ/m²

© Rittal 2026

Features

Connection of round conductors, fine wire without wire end ferrule	1.5 - 95 mm²
Connection of round conductors, fine wire with wire end ferrule	1.5 - 95 mm²
Power loss max.	16 W 55 BTU/h
Heat loss per fuse insert (max.)	12 W
Packaging unit	1 pc(s).
Net weight	0.98 kg
Gross weight	1.178 kg
Customs tariff number	85369095
Product description	RiLineX NH fuse switch disconnectors, size 00, for 60 mm busbar systems. The cover can be locked, sealed and has visual fuse monitoring. Safe voltage testing is carried out via integrated measuring points on the cover. The NH fuse switch disconnectors have a park position to make the maintenance work easier. Connection design with frame terminal for connecting round conductors, min. 1.5 to max. 95 mm². Cable outlet can be individually configured to be at the top or bottom. Includes electronic fuse monitoring. Suitable for voltage range between 180 and 400 V.

Approvals

Explanations	Declaration of conformity