
Rittal – The System.

Faster – better – everywhere.

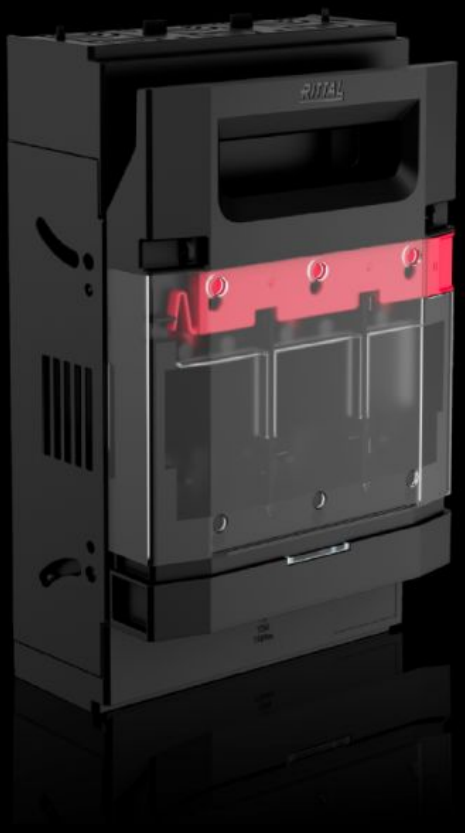

RX 9362.140

RiLineX NH fuse switch disconnector


State: 11/15/2026 (Source: www.rittal.com/us-en)

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

RX 9362.140 - RiLineX NH fuse switch disconnector

RiLineX NH fuse-switch-disconnector in size 1 for 60 mm busbar systems. The cover is lockable, sealable and features visual fuse monitoring. The safe voltage test takes place via the integrated measurement points on the cover. The NH fuse-switch-disconnectors have a park position to simplify maintenance work. Connection design with box terminal for connecting round conductors min. 50 bis max. 150 mm². Cable outlet can be individually converted at the top or bottom.

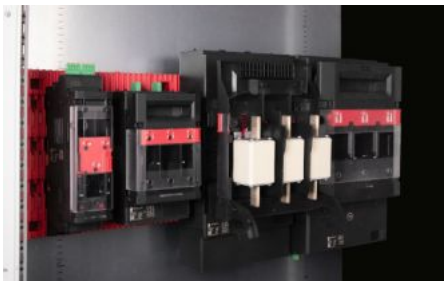





Features

Model No.	RX 9362.140
Version	For 60 mm busbar systems
Benefits	Cover, lockable and sealable Voltage test through separate opening Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm Tool-free conversion of the cable outlet Park position for simplified maintenance work All variants also with electronic fuse monitoring
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94 Contact tracks: Electrolytic copper, silver-plated
Color	RAL 9005 RAL 35745
For bar systems with center-to-center spacing	60 mm
Cable outlet	Top/bottom
Type of connection (electrical)	Box terminal

© Rittal 2026

Features

Fuse inserts	NH 1
Rated operating voltage	1000 V AC
For NH size	1
Test specification	IEC 60 947-3 IEC 60 269-2 (fuse inserts)
Dimensions	Width: 181.5 mm Height: 298 mm Depth: 116.7 mm Width: 7.15 ″ Height: 11.7 ″ Depth: 4.59 ″
Operating temperature range	-5 °C...35 °C 23 °F...95 °F
Storage temperature range	-25 °C...70 °C -13 °F...158 °F
Suitable for busbars	15 x 5/10 20 x 5/10 30 x 5/10
Suitable for busbar system	RiLineX RiLine60
Number of poles	3-pole
Utilization category	AC-23B (400 V/250 A) AC-22B (500 V/250 A) AC-21B (690 V/250 A) AC-22B (800 V/160 A) AC-20B (1000 V/250 A) DC-22B (250 V/250 A) DC-22B (440 V/250 A) DC-20B (800 V/250 A) DC-20B (1000 V/250 A)
Contamination level	3
Protection category IP to IEC 60 529	IP 20
Fire load	40.51 MJ/m²

© Rittal 2026

Features

Power loss max.	51 W 174 BTU/h
Heat loss per fuse insert (max.)	23 W
Packaging unit	1 pc(s).
Net weight	2.607 kg
Gross weight	2.781 kg
Copper weight (kg per piece)	0.8
PCF/VE (cradle-to-gate)	17.58
Customs tariff number	85369095
ETIM 9	EC001040
Product description	RX NH fuse-switch-disconnector, size 1, 250 A, 3-pole, box terminal

Approvals

Approvals	CQC-CCC
Explanations	Declaration of conformity PCF-declaration