

Rittal – The System.

Faster – better – everywhere.



RX 9362.250

**RiLineX NH fuse switch
disconnecter**

State: 4/26/2026 (Source: rittal.com/us-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9362.250 - RiLineX NH fuse switch disconnecter

RiLineX NH fuse-switch-disconnector in size 2 for 60 mm busbar systems. The cover is lockable, sealable and features visual fuse monitoring. The safe voltage test takes place via the integrated measurement points on the cover. The NH fuse-switch-disconnecters have a park position to simplify maintenance work. Connection design with box terminal for connecting round conductors min. 120 bis max. 300 mm². Cable outlet can be individually converted at the top or bottom.

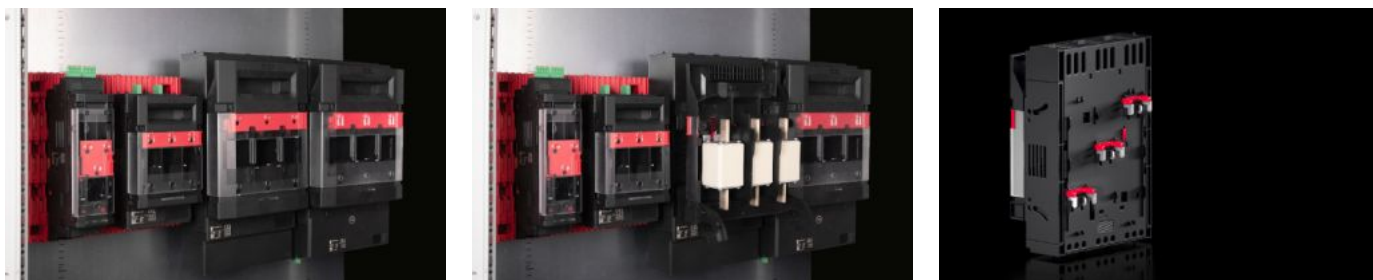

Features

Model No.	RX 9362.250
Version	For 60 mm busbar systems
Benefits	Cover, lockable and sealable Voltage test through separate opening Tool-free conversion of the cable outlet Park position for simplified maintenance work All variants also with electronic fuse monitoring
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94 Contact tracks: Electrolytic copper, silver-plated
Color	RAL 9005 RAL 35745
For bar systems with center-to-center spacing	60 mm
Cable outlet	Top/bottom
Type of connection (electrical)	Box terminal
Fuse inserts	NH 2
Rated operating voltage	690 V AC

Features

For NH size	2
Test specification	IEC 60 947-3 IEC 60 269-2 (fuse inserts)
Dimensions	Width: 208.5 mm Height: 298.6 mm Depth: 134.6 mm Width: 8.21 " Height: 11.8 " Depth: 5.3 "
Operating temperature range	-5 °C...35 °C 23 °F...95 °F
Storage temperature range	-25 °C...70 °C -13 °F...158 °F
Suitable for busbars	15 x 5/10 20 x 5/10 30 x 5/10
Suitable for busbar system	RiLineX RiLine60
Number of poles	3-pole
Contamination level	3
Protection category IP to IEC 60 529	IP 2XB
Fire load	50.96 MJ/m ²
Power loss max.	98 W 334 BTU/h
Packaging unit	1 pc(s).
Net weight	4.25 kg
Gross weight	4.355 kg
Copper weight (kg per piece)	1.75
Customs tariff number	85369095
ETIM 9	EC001040

Features

Product description

RX NH fuse-switch-disconnector, size 2, 400 A, 3-pole, box terminal

Approvals

Explanations

Declaration of conformity

PCF-declaration