
Rittal – The System.

Faster – better – everywhere.

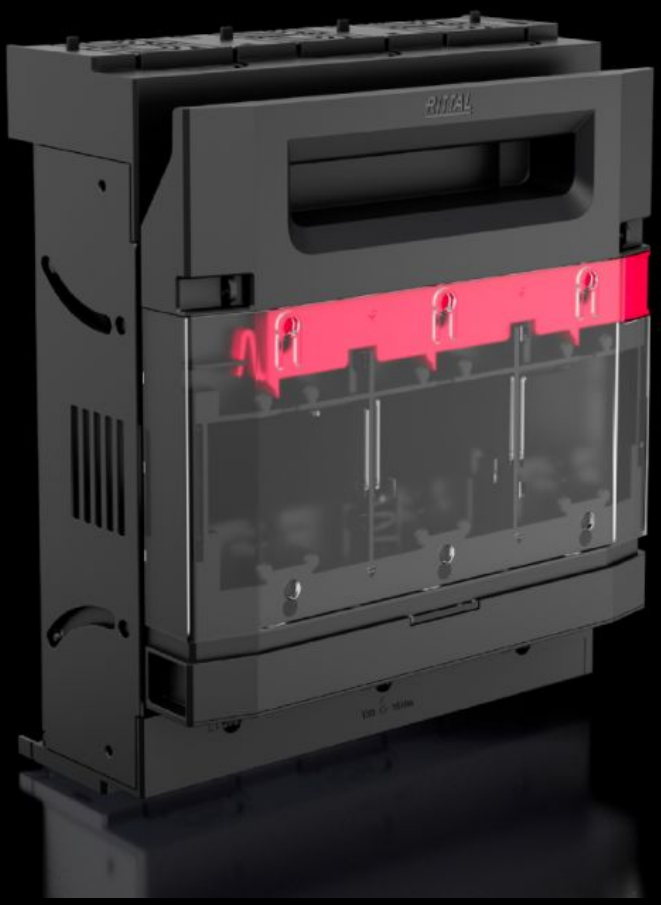


RX 9362.350

RiLineX NH fuse switch disconnector

State: 11/3/2026 (Source: www.rittal.com/us-en)

RX 9362.350 - RiLineX NH fuse switch disconnector

RiLineX NH fuse-switch-disconnector in size 3 for 60 mm busbar systems. The cover is lockable, sealable and features visual fuse monitoring. The safe voltage test takes place via the integrated measurement points on the cover. The NH fuse-switch-disconnectors have a park position to simplify maintenance work. Connection design with box terminal for connecting round conductors min. 120 bis max. 300 mm². Cable outlet can be individually converted at the top or bottom.

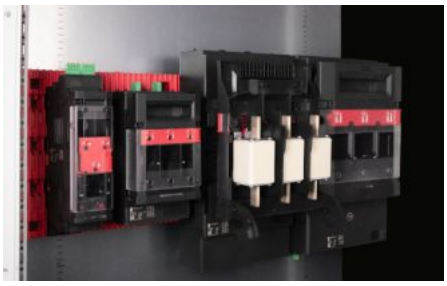





Features

Model No.	RX 9362.350
Version	For 60 mm busbar systems
Benefits	Cover, lockable and sealable Voltage test through separate opening Tool-free conversion of the cable outlet Park position for simplified maintenance work All variants also with electronic fuse monitoring
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94 Contact tracks: Electrolytic copper, silver-plated
Color	RAL 9005 RAL 35745
For bar systems with center-to-center spacing	60 mm
Cable outlet	Top/bottom
Type of connection (electrical)	Box terminal
Fuse inserts	NH 3
Rated operating voltage	1000 V AC

© Rittal 2026

Features

For NH size	3
Test specification	IEC 60 947-3 IEC 60 269-2 (fuse inserts)
Dimensions	Width: 250 mm Height: 298.4 mm Depth: 134.9 mm Width: 9.84 ″ Height: 11.7 ″ Depth: 5.31 ″
Operating temperature range	-5 °C...35 °C 23 °F...95 °F
Storage temperature range	-25 °C...70 °C -13 °F...158 °F
Suitable for busbars	15 x 5/10 20 x 5/10 30 x 5/10
Suitable for busbar system	RiLineX RiLine60
Number of poles	3-pole
Utilization category	AC-23B (400 V/630 A) AC-22B (500 V/630 A) AC-23B (500 V/315 A) AC-22B (690 V/630 A) AC-23B (690 V/315 A) AC-21B (800 V/315 A) AC-20B (1000 V/630 A) DC-22B (250 V/630 A) DC-22B (440 V/630 A) DC-20B (800 V/630 A) DC-20B (1000 V/630 A)
Contamination level	3
Protection category IP to IEC 60 529	IP 20
Fire load	52.86 MJ/m²

© Rittal 2026

Features

Power loss max.	101 W 345 BTU/h
Packaging unit	1 pc(s).
Net weight	4.7 kg
Gross weight	4.9 kg
Copper weight (kg per piece)	2.255
PCF/VE (cradle-to-gate)	32.06
Customs tariff number	85369095
ETIM 9	EC001040
Product description	RX NH fuse-switch-disconnector, size 3, 630 A, 3-pole, box terminal

Approvals

Approvals	CQC-CCC
Explanations	Declaration of conformity PCF-declaration