

# Rittal – The System.

Faster – better – everywhere.



## RX 9362.423

# RiLineX NH fuse switch disconnecter

State: 6/11/2026 (Source: [rittal.com/us-en](http://rittal.com/us-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9362.423 - RiLineX NH fuse switch disconnecter

RiLineX NH fuse-switch-disconnector in size 000 for 60 mm busbar systems. The cover is lockable, sealable and features visual fuse monitoring. The safe voltage test takes place via the integrated measurement points on the cover. The NH fuse-switch-disconnecters have a park position to simplify maintenance work. Connection design with box terminal for connecting round conductors min. 1.5 bis max. 50 mm<sup>2</sup>. Including electronic fuse monitoring.

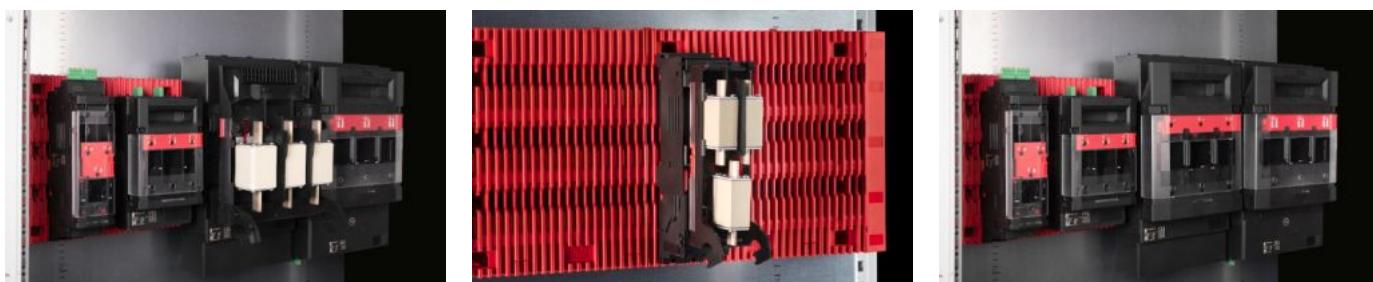

## Features

Model No.	RX 9362.423
Version	For 60 mm busbar systems
Benefits	Cover, lockable and sealable Voltage test through separate opening Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm Tool-free conversion of the cable outlet Park position for simplified maintenance work All variants also with electronic fuse monitoring
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94 Contact tracks: Electrolytic copper, silver-plated
Color	RAL 9005 RAL 35745
Supply includes	Incl. connection plug for electrical fuse monitoring
For bar systems with center-to-center spacing	60 mm
Cable outlet	Bottom
Type of connection (electrical)	Box terminal

# Features

Fuse inserts	NH 000
Rated insulation voltage $U_i$	1,000 V
Rated operating voltage	690 V AC
For NH size	000
Test specification	IEC 60 947-3 IEC 60 269-2 (fuse inserts)
Dimensions	Width: 53 mm Height: 301.1 mm Depth: 103 mm Width: 2.09 " Height: 11.9 " Depth: 4.06 "
Operating temperature range	-5 °C...35 °C 23 °F...95 °F
Storage temperature range	-25 °C...70 °C -13 °F...158 °F
Suitable for busbars	15 x 5/10 20 x 5/10 30 x 5/10
Suitable for busbar system	RiLineX RiLine60
Number of poles	3-pole
Utilization category	AC-23B (400 V/100 A) AC-22B (500 V/100 A) AC-21B (690 V/100 A) DC-22B (250 V/100 A)
Contamination level	3
With electronic fuse monitoring	Yes
Protection category IP to IEC 60 529	IP 2XB
Fire load	13.62 MJ/m <sup>2</sup>

# Features

Connection of round conductors, fine wire without wire end ferrule	1.5 - 16 mm <sup>2</sup>
Connection of round conductors, fine wire with wire end ferrule	1.5 - 50 mm <sup>2</sup>
Power loss max.	36 W 123 BTU/h
Heat loss per fuse insert (max.)	9 W
Packaging unit	1 pc(s).
Net weight	0.96 kg
Gross weight	0.985 kg
Copper weight (kg per piece)	0.404
PCF/VE (cradle-to-gate)	6.54
Customs tariff number	85369095
ETIM 9	EC001040
Product description	RX NH fuse-switch-disconnector size 000, 125 A, 3-pole, outlet at bottom, box terminal, with fuse monitoring

# Approvals

Approvals	CQC-CCC
Explanations	Declaration of conformity PCF-declaration