Rittal – The System.

Faster – better – everywhere.



RX 9363.030

RiLineX NH fuse switch disconnector


State: 11/14/2026 (Source: www.rittal.com/us-en)

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

RX 9363.030 - RiLineX NH fuse switch disconnector

RiLineX NH fuse-switch-disconnector in sizes 00 for mounting plates. The cover is lockable, sealable and features visual fuse monitoring. The safe voltage test takes place via the integrated measurement points on the cover. The NH fuse-switch-disconnectors have a park position to simplify maintenance work. Connection design with box terminal for connecting round conductors min. 1.5 bis max. 95 mm².

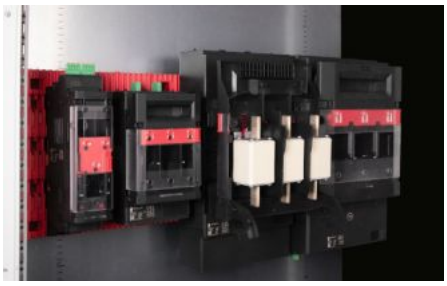





Features

Model No.	RX 9363.030
Version	For mounting panel assembly.
Benefits	Cover, lockable and sealable Voltage test through separate opening Tool-free conversion of the cable outlet Park position for simplified maintenance work All variants also with electronic fuse monitoring
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94 Contact tracks: Electrolytic copper, silver-plated
Color	RAL 9005 RAL 35745
for mounting plate assembly	Yes
Cable outlet	Top/bottom
Type of connection (electrical)	Box terminal

© Rittal 2026

Features

Fuse inserts	NH 00
Rated insulation voltage Ui	1,000 kV
Rated operating voltage	1000 V AC
For NH size	00
Test specification	IEC 60 947-3 IEC 60 269-2 (fuse inserts)
Dimensions	Width: 106 mm Height: 194 mm Depth: 86.1 mm Width: 4.17 ″ Height: 7.64 ″ Depth: 3.39 ″
Connection of round conductors	1.5 - 16 mm²
Operating temperature range	-5 °C...35 °C 23 °F...95 °F
Storage temperature range	-25 °C...70 °C -13 °F...158 °F
Number of poles	3-pole
Utilization category	AC-23B (400 V/160 A) AC-22B (500 V/160 A) AC-21B (690 V/160 A) AC-21B (800 V/63 A) AC-20B (1000 V/160 A) DC-22B (250 V/160 A) DC-21B (440 V/63 A) DC-20B (800 V/160 A) DC-20B (1000 V/160 A)
Contamination level	3
Protection category IP to IEC 60 529	IP 20
Fire load	11.56 MJ/m²
Connection of round conductors, fine wire without wire end ferrule	1.5 - 95 mm²

Features

Connection of round conductors, fine wire with wire end ferrule	1.5 - 95 mm²
Round conductor cross-section	1.5 - 16 mm²
Power loss max.	16 W 55 BTU/h
Heat loss per fuse insert (max.)	12 W
Packaging unit	1 pc(s).
Net weight	0.809 kg
Gross weight	0.829 kg
Copper weight (kg per piece)	0.268
PCF/VE (cradle-to-gate)	5.47
Customs tariff number	85369095
ETIM 9	EC001040
Product description	RX NH fuse-switch-disconnector size 00, 160 A, 3-pole, box terminal, mounting plate assembly

Approvals

Approvals	CQC-CCC
Explanations	Declaration of conformity PCF-declaration