Rittal – The System.

Faster – better – everywhere.



# RX 9364.022

# RiLineX bus-mounting fuse element


State: 11/13/2026 (Source: www.rittal.com/us-en)

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

# RX 9364.022 - RiLineX bus-mounting fuse element

Compact RiLineX bus-mounting fuse element for 60 mm busbar systems. For cylinder fuse 10 x 38 mm with optical LED fuse monitoring. For safe contacting of the cylinder fuses, the device has special fuse holders that can be locked when open and sealed when closed. Tension clamp terminals up to 6 mm² at an angle of 45° make it easier to connect conductors. The device is suitable for tool-free snap-on installation with semi-automatic rail adjustment for 5 and 10 mm.

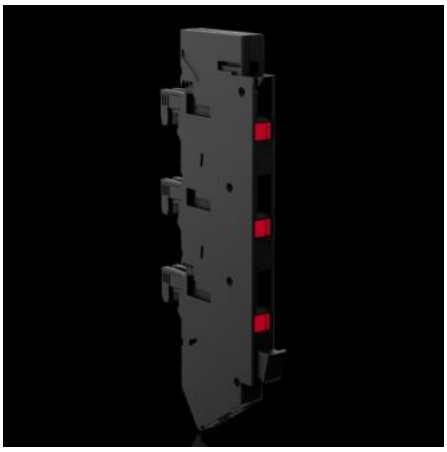



## Features

| | |
|---|---|
| Model No. | RX 9364.022 |
| Benefits | Safe contacting of the fuse links (without screw caps)<br>Snap-on mounting and easy adjustment on busbar thickness 5/10 mm<br>Optical LED fuse monitoring<br>Voltage test through separate opening<br>Maintenance-free tension spring connection up to 16 mm²<br>Complete contact protection without additional accessories such as screw caps |
| Product changes | (secondary) |
| Material | Polyamide (PA 6)<br>Fire protection corresponding to UL 94-V0 |
| Color | RAL 35745<br>RAL 9005 |
| Type of connection (electrical) | Spring terminal |
| Rated current max. | 32 A |

# Features

| | |
|---|---|
| Rated operating voltage | 400 V AC |
| Cable outlet | Bottom |
| Number of poles | 3-pole |
| Suitable for busbar system | RiLineX<br>RiLine60 |
| Dimensions | Width: 17.8 mm<br>Height: 262.5 mm<br>Depth: 95 mm<br>Width: 0.7 ″<br>Height: 10.3 ″<br>Depth: 3.74 ″ |
| Connection of round conductors, fine wire with wire end ferrule | 1.5 - 6 mm² |
| Connection of round conductors, fine wire with wire end ferrule AWG | AWG 16 - AWG 10 |
| Connection of round conductors, multi-wire | 1.5 - 6 mm² |
| Connection of round conductors, multi-wire AWG | AWG 16 - AWG 10 |
| Suitable for busbars | 15 x 5/10<br>20 x 5/10<br>30 x 5/10 |
| Rated voltage | 400 V AC |
| Overvoltage category | 4 |
| Contamination level | 3 |
| Standards | IEC 60 947-3 |
| Rated insulation voltage Ui | 800 V |
| Power loss max. | 3 W<br>10 BTU/h |
| Protection category IP to IEC 60 529 | IP 2XB |
| Maximum operating air humidity | 90 % |

© Rittal 2026

# Features

| | |
|---|---|
| Operating temperature range | -5 °C...55 °C<br>23 °F...131 °F |
| Storage temperature range | -25 °C...75 °C<br>-13 °F...167 °F |
| Ambient humidity (non-condensing) | 10...90 % |
| Utilization category | AC-20B (400 V/100 A) |
| Fuse inserts | 10 x 38 mm |
| Fire load | 3.565 MJ/m² |
| Packaging unit | 4 pc(s). |
| Net weight | 1.008 kg |
| Gross weight | 1.014 kg |
| Copper weight (kg per piece) | 0.043 |
| PCF/VE (cradle-to-gate) | 6.72 |
| Customs tariff number | 85369095 |
| ETIM 9 | EC001644 |
| Product description | RX bus-mounting fuse element 32 A, 3-pole, 10 x 38 mm, with LED, W: 18 mm |

# Approvals

| | |
|---|---|
| Explanations | Declaration of conformity<br>PCF-declaration |