


Rittal – The System.

Faster – better – everywhere.

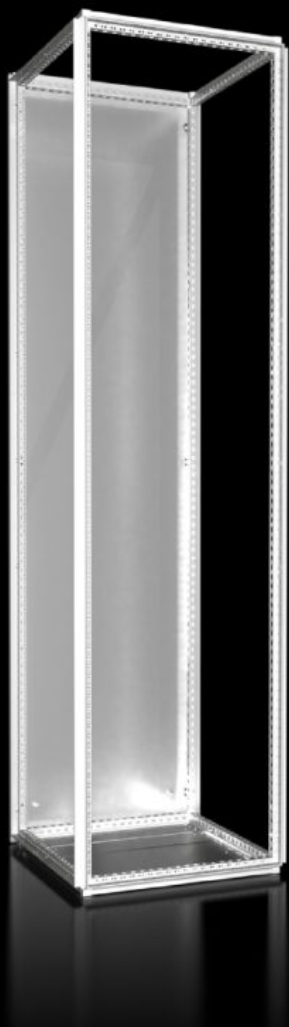

VX 9680.626

Bayed enclosure system VX25

State: 04.08.2025 (Source: [rittal.com/bg-bg](https://www.rittal.com/bg-bg))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



VX 9680.626 - Bayed enclosure system VX25 Modular enclosure

Baying systems VX, for installation with partial doors and internal separation in a modular design.

Features

| | |
|-----------------------------------|--|
| Model No. | VX 9680.626 |
| Material | Sheet steel, 1.5 mm |
| Surface finish | Enclosure frame: Dipcoat-primed Rear panel: Dipcoat-primed, powder-coated on the outside, textured paint Gland plates: Zinc-plated |
| Colour | RAL 7035 |
| Supply includes | Enclosure frame Rear panel Gland plates |
| Protection category to IEC 60 529 | Up to IP 54, depending on the panels |
| Test specification | IEC 61 439-1/-2 IEC 61 641 |
| Dimensions | Width: 600 mm Height: 2,200 mm Depth: 600 mm |
| Packs of | 1 pc(s). |
| Net weight | 45.29 |
| Gross weight | 49 |
| PCF per pack (cradle-to-gate) | 133 kg CO2 eq (Cat B) |
| Note on PCF category | Category B: PCF value (cradle-to-gate) based on the product weight, approximately calculated and self-declared |
| EAN | 4028177929548 |
| ETIM 9 | EC000261 |

Features

| | |
|------------|----------|
| ECLASS 8.0 | 27180101 |
|------------|----------|

Approvals

| | |
|--------------|---|
| Certificates | Surface finish |
| Explanations | Declaration of conformity Declaration of conformity UK |