


Faster – better – everywhere.



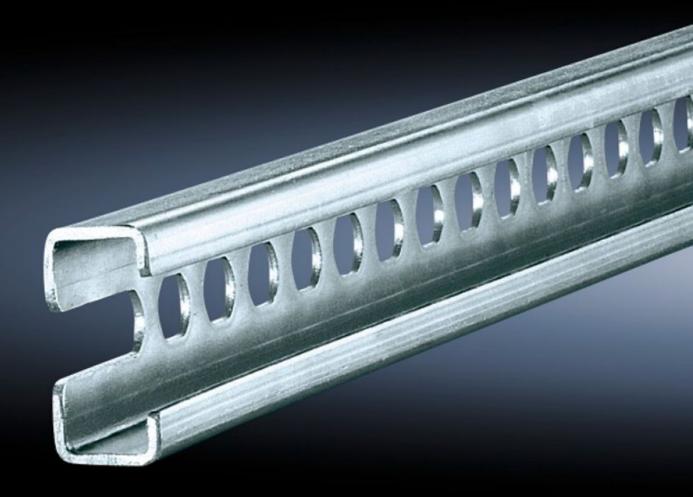

SZ 4946.000 C rails 30/15

State: 2025-08-15 (Source: rittal.com/ca-en)



POWER DISTRIBUTION CLIMATE CONTROL


IT INFRASTRUCTURE SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

ENCLOSURES

SZ 4946.000 - C rails 30/15 to EN 60 715 for VX, TS, VX SE

For direct mounting on the horizontal enclosure profile or vertical enclosure profile using additional fastening components.

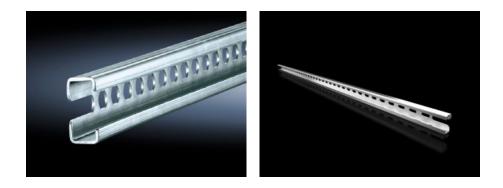

Features

Model No.	SZ 4946.000
Material	Carbon steel
Surface finish	Zinc-plated
Length	955 mm
Installation options	On the inner mounting level, on VX enclosure profile
	On the vertical TS, VX SE enclosure section via snap-on nuts TS
	8800.808 or adapter rail for VX compatibility
	On the horizontal VX SE enclosure profile in the width bottom and
	top
	On the horizontal VX SE enclosure section in depth at the bottom
	(without mounting plate) and at the top using snap-on nut 8800.808 On the horizontal TS enclosure section
	In the width or depth of the 3-part AX. Depending on the installation
	situation, the rail must be shortened to the desired length.
Installation options VX Base	In base/plinth width 1,000 mm on the base/plinth panels, in
	conjunction with retaining/spacer piece
installation options AX Base	In base/plinth width 1,000 mm, in conjunction with hexagon socket tapping screws

Features

Suitable for	Enclosure type: VX
	TS
	AX wall-mounted housing, 3-part
	Suitable for width/depth: 1,000 mm
Suitable for	AX base/plinth system
	VX base system
Packaging unit	6 pc(s).
Net weight	3.54
Gross weight	4.14
PCF/VE (cradle-to-gate)	15.7 kg CO2 eq (Cat B)
Information regarding the PCF	Category B: PCF value (cradle-to-gate) calculated approximately on
class	the basis of the product weight and self-declared
Customs tariff number	73269098
EAN	4028177114630
ETIM 9	EC000386
ETIM 8	EC000386
ECLASS 8.0	27400602