

# Rittal – The System.

Faster – better – everywhere.



## RX 9360.600

## RiLineX CB device adapter

State: 2026-05-15 (Source: [rittal.com/ca-en](https://www.rittal.com/ca-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE



SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9360.600 - RiLineX CB device adapter

CB device adapter (3-pole, max. 160 A) for the RiLineX busbar platform and 60 mm busbar systems such as RiLine60. The device width on the busbar system is 81 mm. The "universal" version with sliding nuts offers maximum flexibility for switch installation. The adapter has tool-free snap-on mounting with semi-automatic adjustment of the rail thickness between 5 and 10 mm. Version for cable outlet at the bottom.

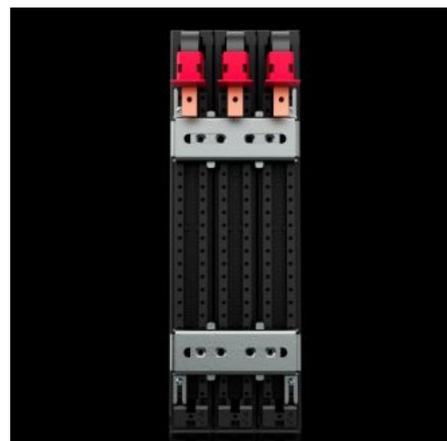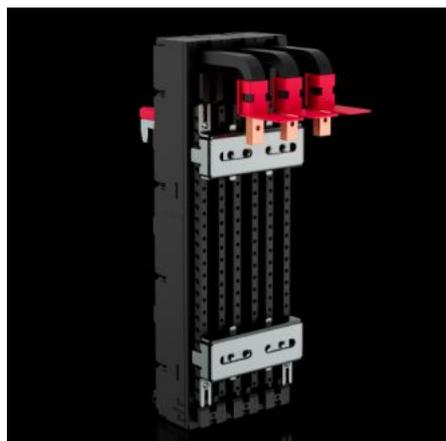

## Features

Model No.	RX 9360.600
Version	universal
Benefits	Direct mounting of compact circuit breaker MCCB on the board Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm Quick and easy pre-assembly of standard switch types outside the control cabinet
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94
Color	RAL 9005 RAL 35745
Supply includes	Incl. 3 connection compartment covers
Protection category IP to IEC 60 529	IP 2XB
Rated impulse withstand voltage UImp	8 kV

# Features

Rated voltage	690 V AC 690 V DC 600 V AC (UL)
Rated insulation voltage $U_i$	1,000 V
Contamination level	3
Number of poles	3-pole
Cable outlet	Bottom
Cross-section	9 mm <sup>2</sup> 6 mm <sup>2</sup>
To fit manufacturer (model)	Easily find the right device adapter with our selection guide in the Downloads area.
Suitable for busbar system	RiLineX RiLine60
Fundamental frequency	50...60 Hz
Ambient humidity (non-condensing)	10...90 %
Suitable for busbars	15 x 5/10 20 x 5/10 30 x 5/10
Operating temperature range	-25 °C...55 °C
Storage temperature range	-25 °C...75 °C
Dimensions	Width: 81.9 mm Height: 251.4 mm Depth: 50.8 mm
Packaging unit	1 pc(s).
Net weight	0.92 kg
Gross weight	1.22 kg
Copper weight (kg per piece)	0.375
Customs tariff number	85369095
ETIM 9	EC001531

# Features

---

Product description	RX CB device adapter 160 A, 3-pole, version: Universal Fix, cable outlet at bottom, W: 81 mm
---------------------	--

# Approvals

---

Approvals	UL + C-UL (listed)
Explanations	Declaration of conformity PCF-declaration