


Rittal – The System.

Faster – better – everywhere.

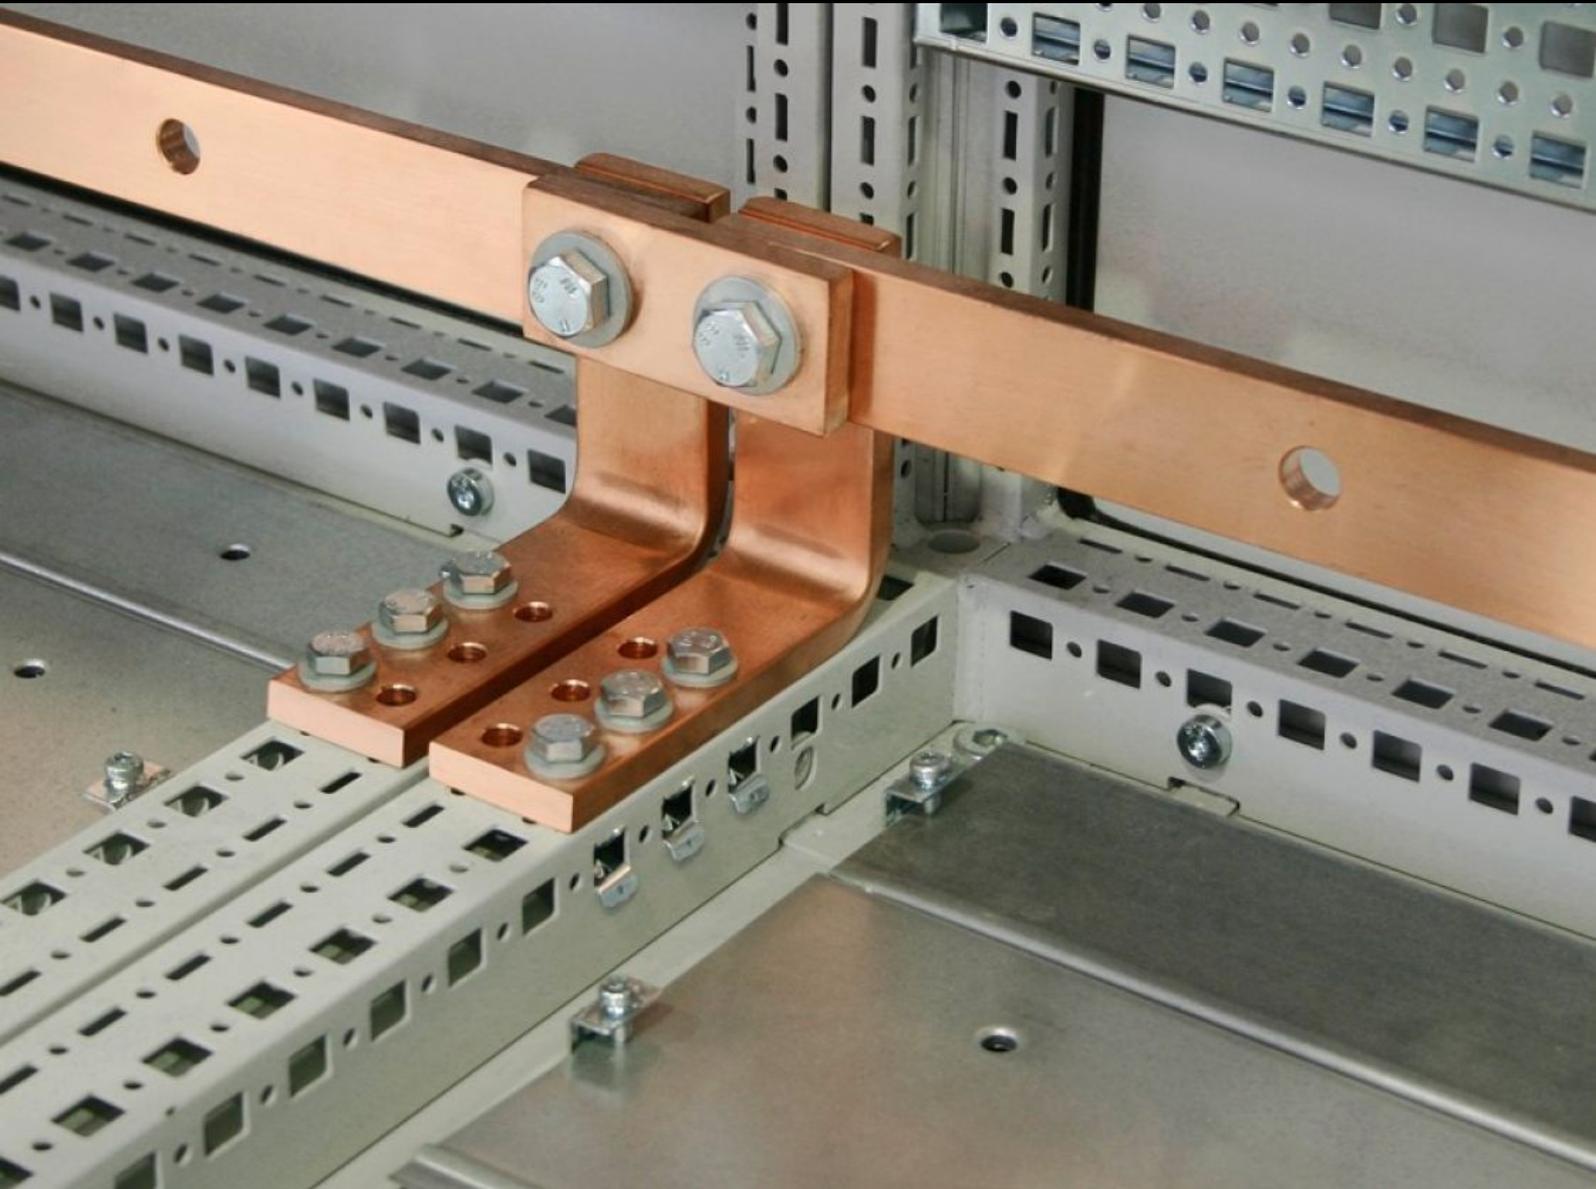

SV 9661.235

PE/PEN Combination Angle, E-Cu

State: 2026-03-04 (Source: [rittal.com/ca-en](https://www.rittal.com/ca-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



SV 9661.235 - PE/PEN Combination Angle, E-Cu for PE/PEN combinations

The PE/PEN combination, comprising busbars, combination angles and baying brackets, supports type-tested configurations as per IEC 61 439-1.

Features

Model No.	SV 9661.235
Product description	The PE/PEN combination, comprising busbars, combination angles and baying brackets, supports type-tested configurations as per IEC 61 439-1.
Benefits	The pre-assembled combination angles, baying brackets and the busbars individually cut to the enclosure width make for extremely time and cost-efficient assembly
Applications	Form 2-4 Others
Material	E-Cu
Supply includes	Assembly components
Approved short-circuit current capability	I _{cw} 18 kA, 1 sec.
Suitable for busbars	Busbar E-Cu with integral punchings
OUT_CROSS_SECTION_COL_SM	30 - 5 mm
Suitable for busbars	Width: 30 Height: 5 mm
Packaging unit	4 pc(s).
Net weight	1.156 kg
Gross weight	1.256 kg
Copper weight (kg per piece)	0.198
Customs tariff number	74198090
ETIM 9	EC000329

Features

ECLASS 8.0

27400605

Product description

SV PE/PEN combination angle E-Cu, WH: 30x5 mm

Approvals

Explanations

Declaration of conformity

Declaration of conformity UK