


Rittal – The System.

Faster – better – everywhere.

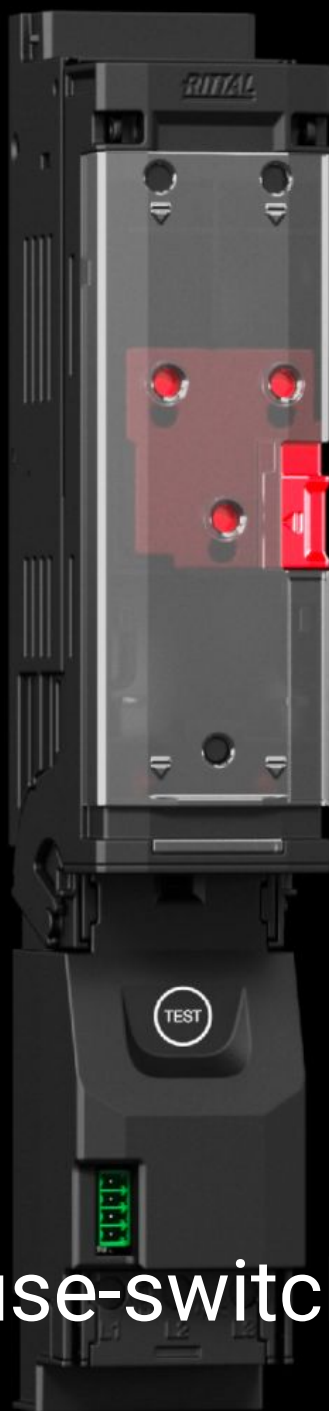

RX 9363.425 RiLineX NH fuse-switch disconnecter

State: 2025.12.8 (Source: [rittal.com/lt-en](https://www.rittal.com/lt-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9363.425 - RiLineX NH fuse-switch disconnecter

RiLineX NH fuse-switch disconnecter in size 000 for mounting plates. The cover can be locked and prepared for a lead seal. It also has visual fuse monitoring. Integrated measuring points on the cover ensure safe voltage testing. NH fuse-switch disconnectors have a park position to make maintenance easier. Box terminal connection to connect round conductors ranging from min. 1.5 to max. 50 mm². Includes electronic fuse monitoring.

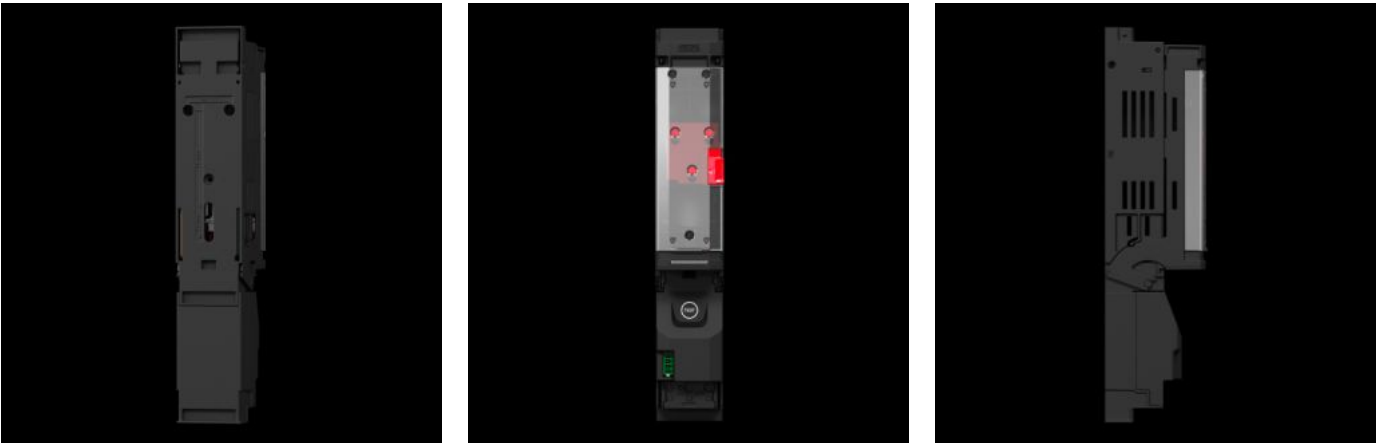

Features

| | |
|-----------------------------|---|
| Model No. | RX 9363.425 |
| Design | For mounting plate assembly |
| Benefits | Cover: can be locked and prepared for a lead seal Voltage test through separate opening Tool-free changeover of the cable outlet Park position for simpler maintenance work All variants also available with electronic fuse monitoring |
| Material | Polyamide (PA 6) Fire protection corresponding to UL 94 Contact tracks: Electrolytic copper, silver-plated |
| Colour | RAL 9005 RAL 35745 |
| Supply includes | Connectors for electronic fuse monitoring |
| for mounting plate assembly | Yes |
| Cable outlet | Top/bottom |

Features

| | |
|--|--|
| Type of electrical connection | Box terminal |
| Rated insulation voltage | 1,000 kV |
| Rated current max. | 125 A |
| Rated operating current max. | 125 A |
| Rated operating voltage | 690 V AC |
| For NH size | 000 |
| Test specification | IEC/DIN EN 60 947-3 DIN EN 60 269-2 (fuse inserts) |
| Dimensions | Width: 53 mm Height: 307.3 mm Depth: 80.1 mm |
| Connection of round conductors | 1.5 - 16 mm ² |
| Operating temperature range | -5 °C...35 °C |
| Storage temperature range | -25 °C...70 °C |
| Number of poles | 3-pole |
| Utilisation category | AC-23B (400 V/100 A) AC-21B (500 V/100 A) DC-22B (250 V/100 A) |
| Contamination level | 3 |
| with electronic fuse monitoring | Yes |
| IP protection category to IEC 60 529 | IP 2XB |
| Fire load | 9.69 MJ/m ² |
| Connection of round conductors, fine wire without wire end ferrule | 1.5 - 16 mm ² |
| Connection of round conductors, fine wire with wire end ferrule | 1.5 - 50 mm ² |
| Round conductor cross-section | 1.5 - 16 mm ² |
| Power dissipation (max.) | 26 W |
| Packs of | 1 pc(s). |

Features

| | |
|------------------------------|----------|
| Net weight | 0.76 |
| Gross weight | 0.779 |
| Copper weight (kg per piece) | 0.26 |
| Customs tariff number | 85369095 |
| ETIM 9 | EC001040 |

Approvals

| | |
|--------------|---------------------------|
| Explanations | Declaration of conformity |
|--------------|---------------------------|