
Rittal - The System.

Faster – better – everywhere.



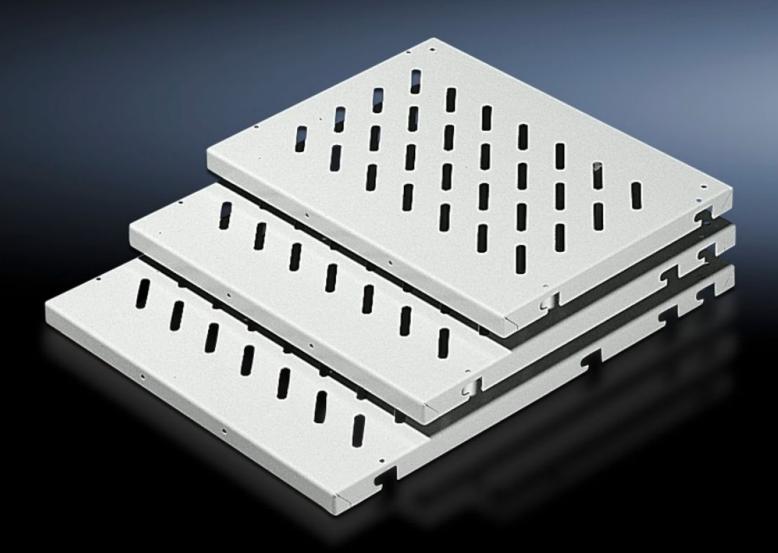

DK 7166.035

Component Shelf for Frame Attachment

State: 6/27/2025 (Source: rittal.com/us-en)



DK 7166.035 - Component Shelf for Frame Attachment

For frame attachment, installed in enclosures without 482.6 mm (19") accommodation, enclosure width: 600 and 800 mm, load capacity: 50 kg/100 kg.

Features

Model No.	DK 7166.035
Version	Slotted
Product description	For frame attachment, installed in enclosures without 482.6 mm (19") accommodation.
Benefits	Mounting bolts or mounting rails may be installed on a 25 mm hole pattern in the enclosure depth Mounting hole for handles provided.
Applications	For installing in enclosures without 482.6 mm (19") feature
Material	Carbon steel
Surface finish	Spray-finished
Color	RAL 7035
Supply includes	Component shelf, slotted 4 pc(s), fixing bolts
Installation options	Static installation: Component shelf, 50 kg with fixing bolts on punched section without mounting flange Static installation: Component shelf, 100 kg with mounting rails on punched sections without mounting flange Depth variable: device base with telescopic rails on mounting chassis
Load capacity	50 kg surface load
Mounting tip	Two system chassis are also required for the inner mounting level
Note	Max. depth of component shelves = Enclosure depth - 100 mm.

© Rittal 2025 2

Features

Width: 471 mm
Height: 29 mm
Depth: 600 mm
Width: 18.5 ″
Height: 1.14 "
Depth: 23.6 "
Enclosure type: VX
VX IT
TS IT
Width: 600 mm
Enclosure type: VX
VXIT
TSIT
Width: 23.6 "
1 pc(s).
3.12
3.32
14.6 kg CO2 eq (Cat B)
Category B: PCF value (cradle-to-gate) based on the product weight,
approximately calculated and self-declared
94039910
4028177165816
EC002620
27189261

© Rittal 2025 3