


Rittal – The System.

Faster – better – everywhere.

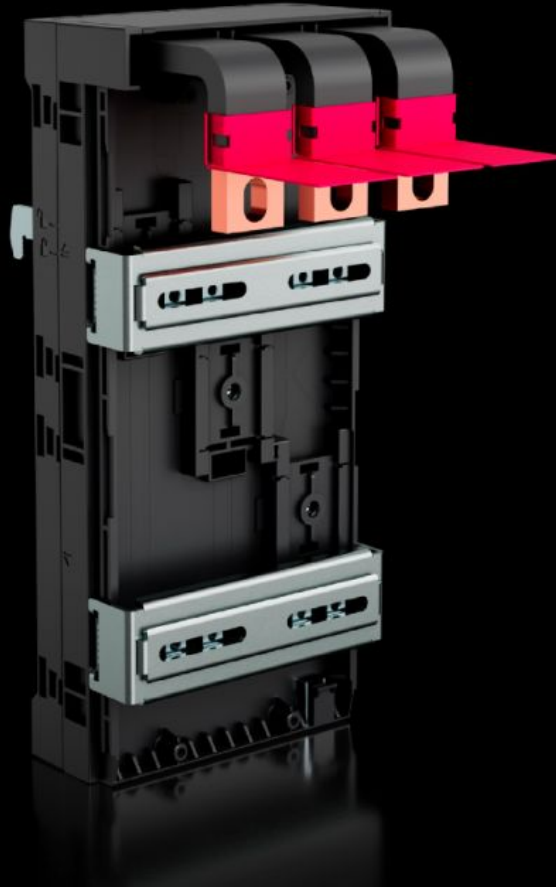

RX 9360.635

RiLineX CB device adapter

State: 7/4/2026 (Source: rittal.com/us-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9360.635 - RiLineX CB device adapter

RiLineX CB device adapter (3-pole, max. 630 A) for 60 mm busbar systems. The device width is 145 mm. The "universal" version with sliding nuts offers maximum flexibility for switch installation. The adapter has tool-free snap-on mounting with semi-automatic adjustment of the rail thickness between 5 and 10 mm. The cable outlet can be adapted to individual requirements by simply converting the outlet at the bottom or top.

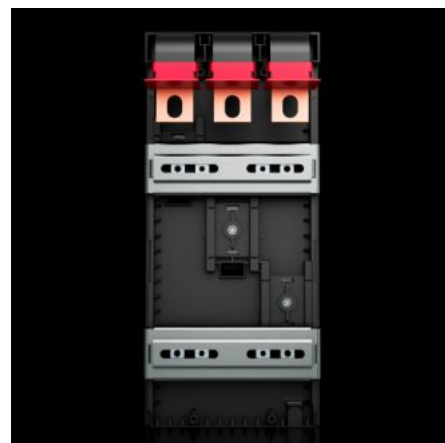

Features

Model No.	RX 9360.635
Version	universal
Benefits	Direct mounting of compact circuit breaker MCCB on the board Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm Quick and easy pre-assembly of standard switch types outside the control cabinet
Material	Polyamide (PA 6) Fire behavior corresponding to UL 94
Color	RAL 9005 RAL 35745
Supply includes	Incl. 3 connection compartment covers, 2 crossbars and fastening material
Protection category IP to IEC 60529	IP 2XB

Features

Rated impulse withstand voltage U _{Imp}	8 kV
Rated voltage	690 V AC 600 V AC (UL)
Rated insulation voltage U _i	1,000 V
Contamination level	3
Number of poles	3-pole
Cable outlet	Top/bottom
Type of connection (electrical)	Screw M10
Cross-section	29 mm ² 10 mm ²
To fit manufacturer (model)	Easily find the right device adapter with our selection guide in the Downloads area.
Suitable for busbar system	RiLineX RiLine60
Fundamental frequency	50...60 Hz
Ambient humidity (non-condensing)	10...90 %
Suitable for busbars	15 x 5/10 20 x 5/10 30 x 5/10
Operating temperature range	-25 °C...55 °C -13 °F...131 °F
Storage temperature range	-25 °C...75 °C -13 °F...167 °F
Dimensions	Width: 145 mm Height: 325.8 mm Depth: 76.4 mm Width: 5.71 " Height: 12.8 " Depth: 3.01 "
Fire load	16.043 MJ/m ²

Features

Packaging unit	1 pc(s).
Net weight	4.52 kg
Gross weight	4.722 kg
Copper weight (kg per piece)	2.64
PCF/VE (cradle-to-gate)	28.1
Customs tariff number	85369095
ETIM 9	EC001531
Product description	RX CB device adapter 630 A, 3-pole, version: Universal Fix, W: 140 mm

Approvals

Approvals	UL + C-UL (listed)
Explanations	Declaration of conformity PCF-declaration